


**Tricot**  
PRODUCTS

# ANTILOOP

INDUSTRIAL YARN CONTROL

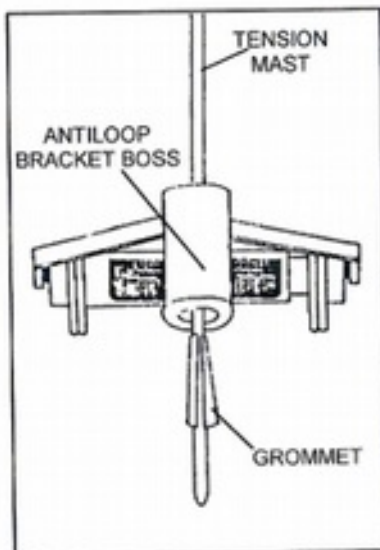

## INSTRUCTIONS

### ASSEMBLY

First remove tension mast from machine. Insert bottom of tension mast into boss with Antiloop label facing upwards. Take appropriate size grommet and press onto rod as low as possible below Antiloop bracket. Press Antiloop bracket boss firmly down onto grommet.

Feed each strand of yarn between control discs either at front or rear of said discs and then all strands through one of normal yarn guide loops and yarn brake.

Upto four strands may be placed in each pair of control discs. Two in front and two in rear.

Depending on the weight of yarn being used, it is sometimes advisable to by-pass the normal yarn brake and feed the strands directly to the tension spring via the yarn guide loops.

Tension swatches should always be knitted with the Antiloop in operation.

Tricot Products are manufactured & distributed by  
B. Hague & Co. Ltd. Colwick, Nottingham, England.  
[www.b-hague.co.uk](http://www.b-hague.co.uk)

**Tricot**  
PRODUCTS

# 'ANTILOOP'

Industrial Yarn Control  
PRODUCT CODE TPP03


**The Multi- Strand Yarn Feed  
Prevents Loops and Snarl-ups**

Tricot Products are manufactured & distributed by  
B. Hague & Co. Ltd. Colwick, Nottingham, England.  
[www.b-hague.co.uk](http://www.b-hague.co.uk)

**Tricot**  
PRODUCTS

# NOT - a - KNOT

TPP01

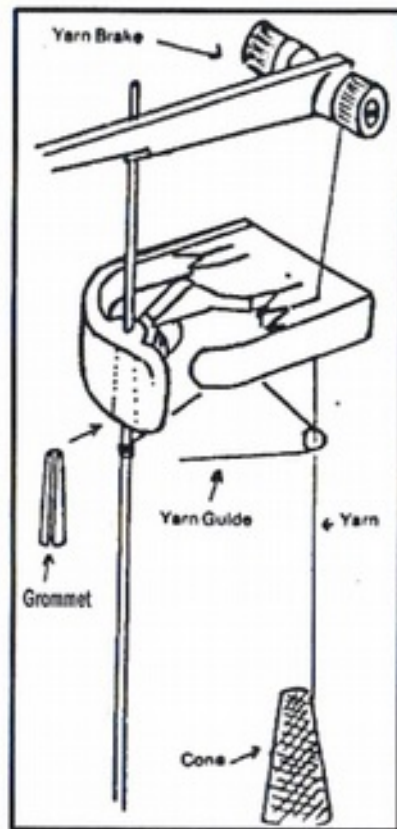

## INSTRUCTIONS.

1. Press Grommet slot firmly on to yarn brake rod 2" to 3" above yarn guide loops.
2. Remove yarn brake assembly from top of rod.
3. Place hole in NOT A KNOT boss on to rod and press firmly down on to grommet.
4. Replace yarn brake.
5. With machines having the yarn brake close in to the support rod, it is sometimes advantageous to place the NOT A KNOT about 4" below the yarn guide loops. In which case the support rod is removed from the machine and the NOT A KNOT slid upwards from the bottom of the rod. The grommet is then placed on the rod and the NOT A KNOT pressed on to same. The rod is then replaced.
6. Feed yarn behind divided guide rail below slots and place yarn to run through appropriate slot. outer slots 1 to 4 ply, inner slots double knit plus.
7. After removing knots or slubs in yarn ensure yarn is replaced in correct slot.
8. When using slub or boucle yarns, such yarns must by-pass NOT-A-KNOT.  
Adjust Bell screw if necessary

**N.B DO NOT PULL KNOTS OR SLUBS DOWNWARDS THROUGH SLOTS.**

Tricot Products are manufactured & distributed by  
B. Hague & Co. Ltd. Colwick, Nottingham, England  
[www.b-hague.co.uk](http://www.b-hague.co.uk)

**Tricot**  
PRODUCTS

Product code TPP01

*The invaluable*

# NOT - a - KNOT

*gives early warning of KNOTS and SLUBS.*

Tricot Products are manufactured & distributed by  
B. Hague & Co. Ltd. Colwick, Nottingham, England.  
[www.b-hague.co.uk](http://www.b-hague.co.uk)

