

The

DESIGNS TO COVER ALL STANDARD GAUGE
KNITTING MACHINES INCLUDING KH710




Beginners Collection




1





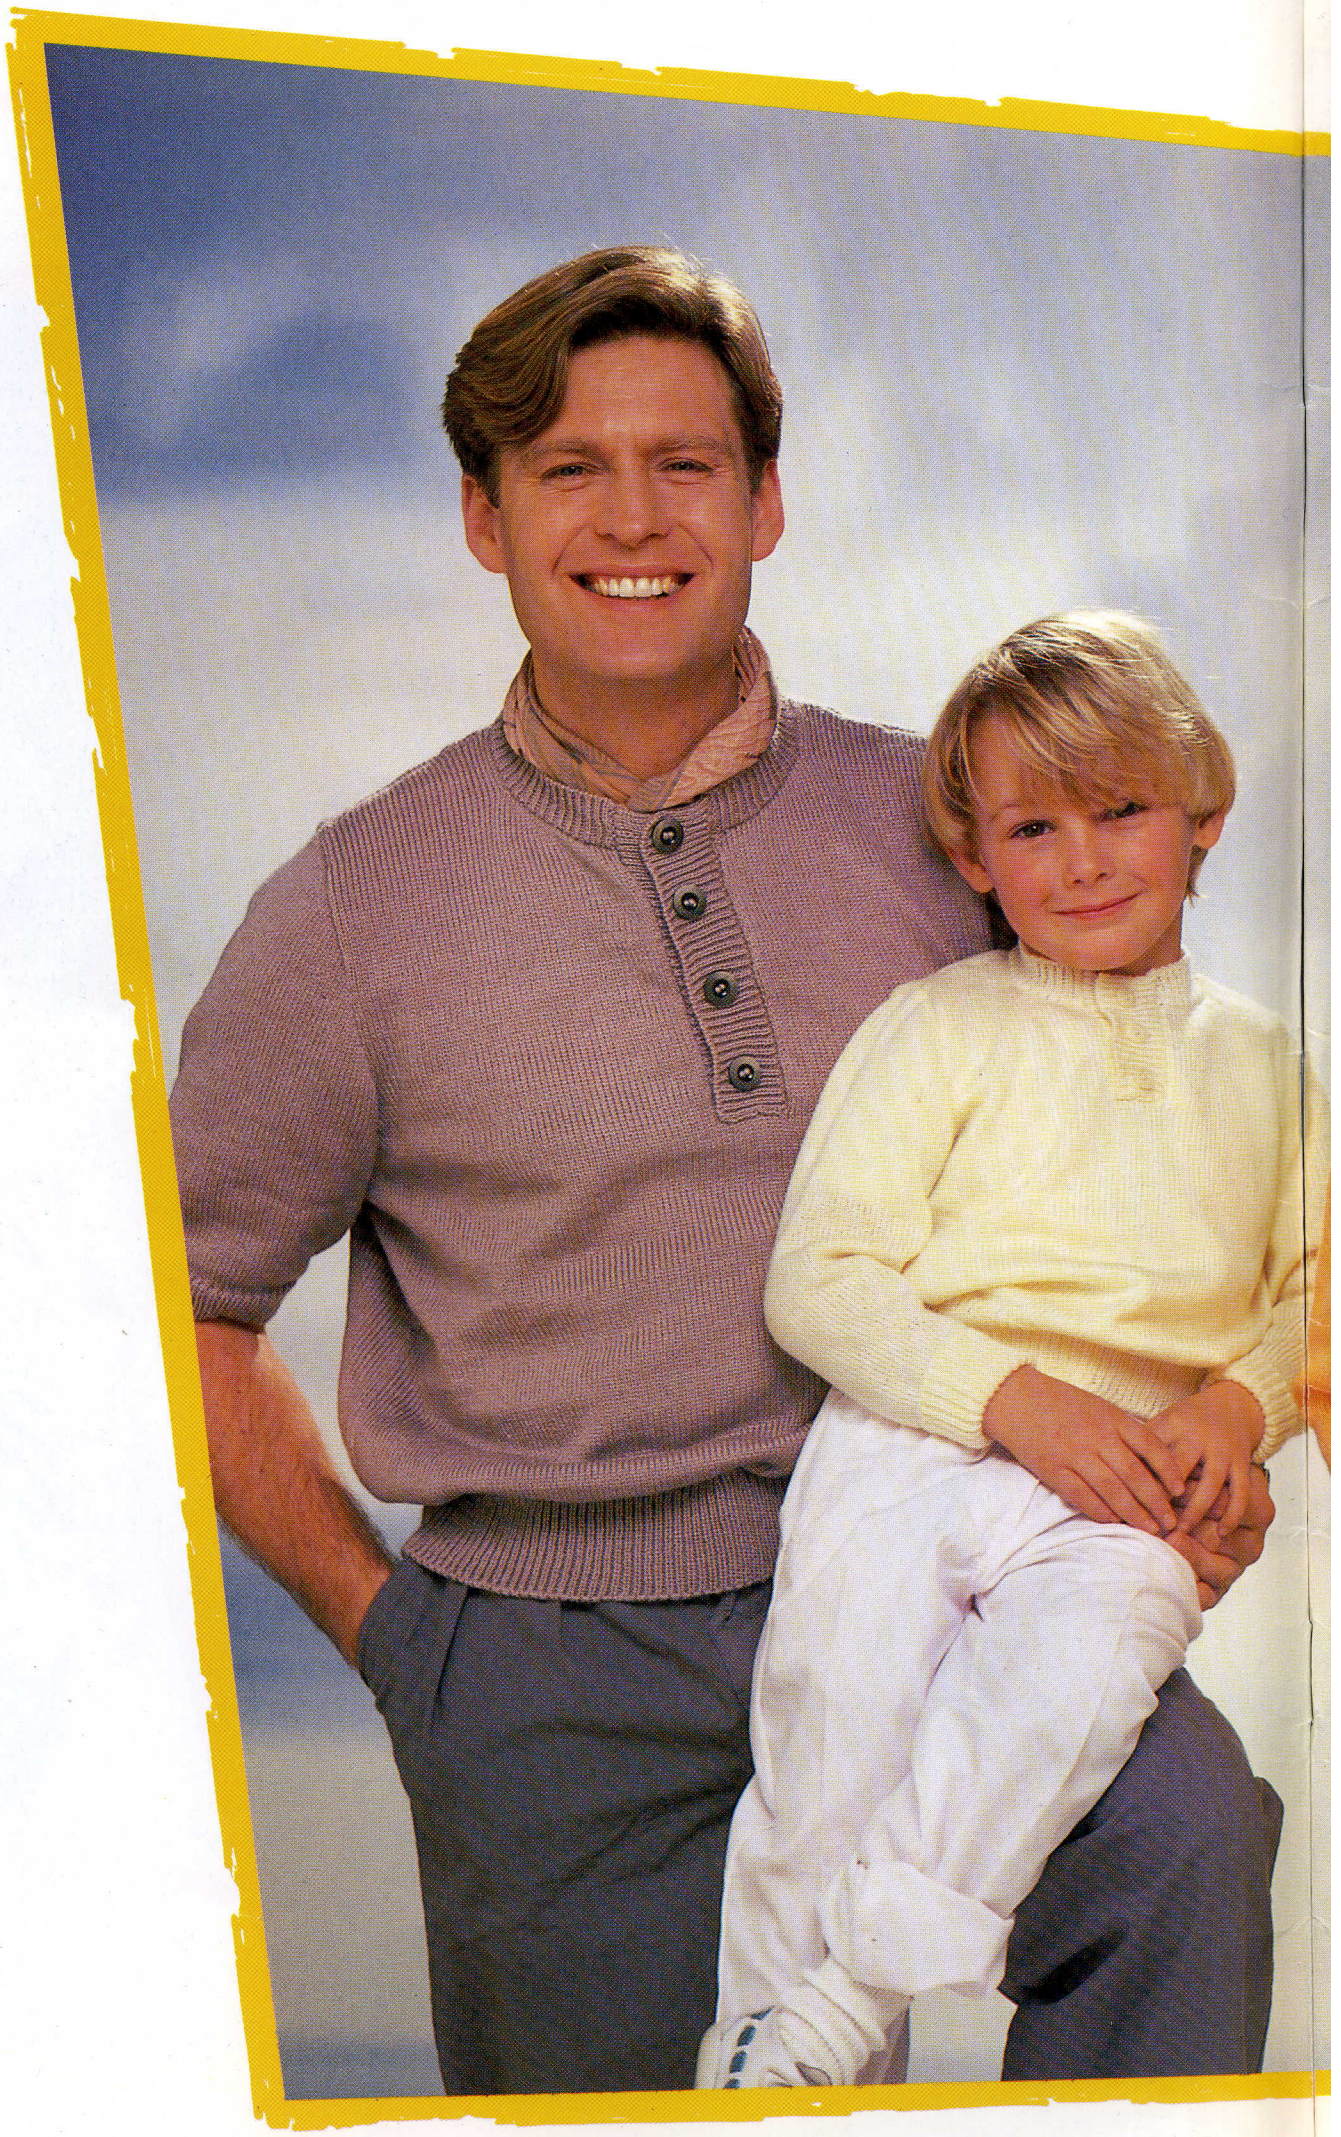



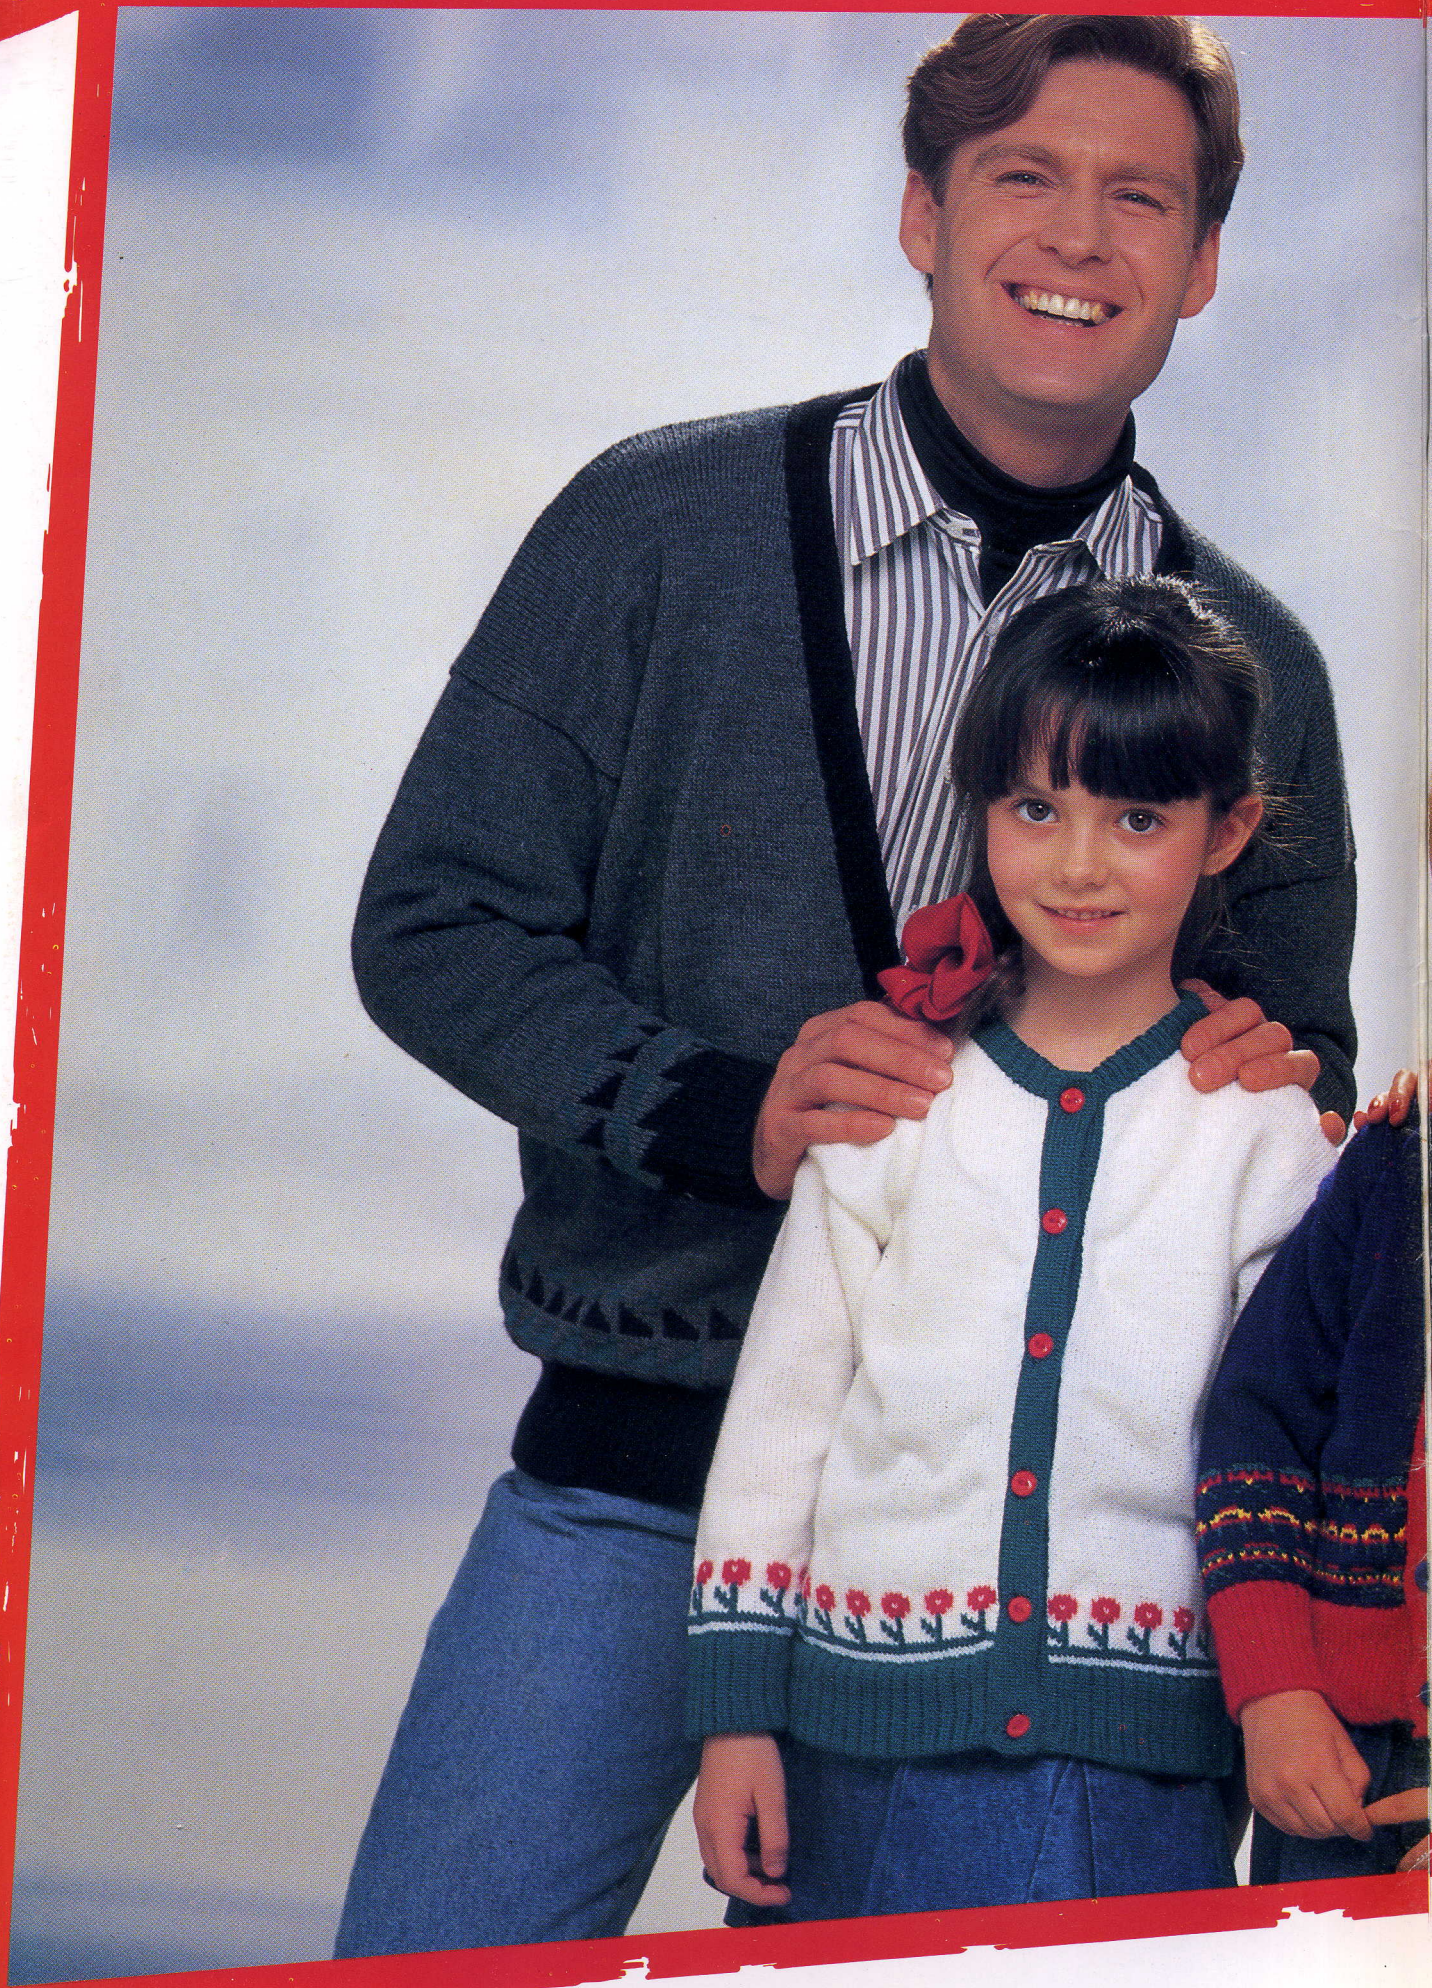





THE BROTHER BEGINNERS COLLECTION

These patterns have been designed to use for all your family garments.

Each one has been written with the new machine knitter in mind, so you will find very clear instructions especially in the first few pages regarding techniques.

As a number of garments have a large size range, you will be able to now have designs for all the family, but I suggest that if you are a very new knitter you start with a plain jumper or cardigan and work your way towards the tuck stitch and lace garments.

JACKIE MARKLEW
Product Services Manager

BEFORE YOU START

Read the complete instructions to make sure you understand them.

Knit a tension swatch and let it rest for at least 1 hour and preferably overnight.

If the pattern is written in more than 4 sizes you may find it helpful to ring or mark with a highlight pen, all the figures that refer to the size you are following.

ABBREVIATIONS

alt	alternate	LC	Lace carriage
approx	approximately	MB	main bed
beg	begin(ning)	MY	main yarn
carr	carriage	patt	pattern
cm	centimetres	RC	row counter
COBH	cast on by hand	rem	remain(ing)
COL	carriage on left	rep	repeat(ing)
COR	carriage on right	st(s)	stitch(es)
cont	continue	st st	stocking stitch
DB	double bed machines or machines with a ribbing attachment	T	tension dial setting
dec	decrease(ing)	tog	together
FA	Feeder A	trans	transfer
FB	Feeder B	WY	waste yarn
foll	following	dec 1 st ff	decrease one stitch fully fashioned
g	grammes	inc 1 st ff	increase one stitch fully fashioned
HP	hold or E position	*	refer back to * as instructed
inc	increase(ing)		

MACHINES: Group A machines, 24 stitch pattern repeat.
Group B machines, 8 stitch pattern repeat.
Group C machines, electronic or by hand selection.

YARN FINDER

In order to help you find the yarns we have used in the patterns, we have compiled a list of names and addresses of the spinners involved, so should you have any difficulty in obtaining them, send an S.A.E. for an expedient reply to:

ARGYLL WOOLS LTD.
PO Box 15,
Priestley Mills,
Pudsey, West Yorkshire, LS28 9TL.

ATKINSONS YARN
Terry Mills,
Ossett,
West Yorkshire.

F. W. BRAMWELL AND CO LTD.
Unit 5,
Metcalf Drive,
Altham,
Nr. Acreington.

TENSION

Your garment will only be the correct size if you obtain the same tension as given in the pattern. Because of slight variances in the yarn and individual machines you may not achieve the correct tension with the tension dial set on the number suggested in the pattern. If the measurements of the tension swatch do not match those given in the pattern you should make another swatch with the tension dial set on a number higher or lower as required.

To knit a tension swatch:

The whole of the swatch, including the rows in WY, should be worked in the stitch required for the garment.

Using MY cast on 60 sts and knit 10 rows. Change to WY and knit 2 rows.

Set tension dial to the dot $\frac{1}{3}$ tighter than the main tension suggested in the pattern.

RC 000. Knit 30 rows. Using odd lengths of contrasting yarn, knit by hand, the 21st needle at each side of 0 so leaving 40 sts between the marked sts. Knit a further 30 rows in MY then 2 rows in WY. RC reads 62.

Change tension dial by 1 dot to the number suggested in the pattern and repeat the last 62 rows, marking the 21st needles on the 30th row as before. RC reads 124.



Change tension dial to suggested tension plus $\frac{1}{3}$ and work a further 62 rows as before. RC reads 186.

With MY knit 10 rows. RC reads 196. Break off yarns and remove piece from machine. There is no need to cast off.

To measure tension swatch:

Lay tension swatch out flat and press according to manufacturers instructions. If in doubt DO NOT PRESS.

Using a ruler and working over 2nd section of 40 sts and 60 rows, measure in cm the distance between the 2 marked sts. Compare the measurement to the one given in the pattern. Measure the 60 rows between the contrast rows and compare this measurement also.

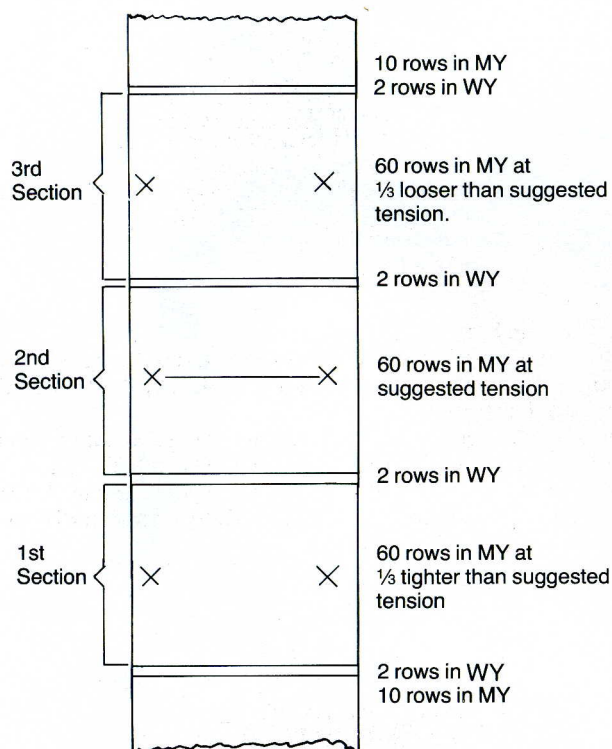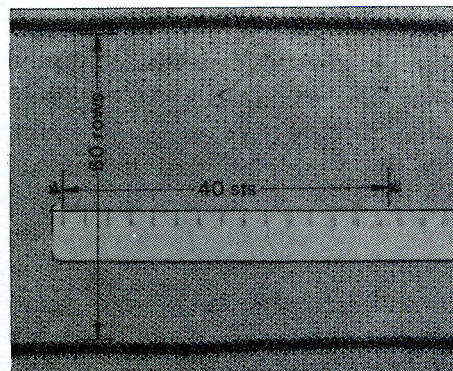

When the swatch is first removed from the machine it is still pulled out to the width of the needles. In order to let the yarn go back to its natural shape pull the swatch lengthways a couple of times and then leave to relax into its natural shape.

Allow the swatch to rest for at least 1 hour and preferably overnight before measuring.

For easy reference always label tension swatches with the name of the yarn, details of the stitch pattern and setting of the tension dial.

If both measurements are correct, knit pattern.

If both measurements are not the same as given in the pattern, work as follows:

If either measurement is **greater** than the correct measurement your tension was too loose. Measure the first set of 40 sts and 60 rows knitted at suggested tension minus $\frac{1}{3}$. If either measurement is still too large you will need to knit another swatch starting with the tension dial set at suggested tension minus $1\frac{1}{3}$.

If either measurement is **less** than the correct measurement, your tension was too tight and you should measure the last set of 40 sts and 60 rows knitted at suggested tension plus $\frac{1}{3}$. If either measurement is still too small you will need to knit another swatch starting with the tension dial set at suggested tension plus $\frac{2}{3}$.

Please note that you may find that the row tension alters more than the st tension and that you can have the same measurement for the sts with several different measurements over the rows. You should always try to achieve the correct measurement for both rows and sts but if you are unable to do so you should work to the correct st measurement with the row measurement as close as possible. If the measurement for the row tension is less than that given in the pattern the finished length of the garment will be shorter than given. If the measurement for the row tension is greater than that given in the pattern the finished length will be longer.

If you wish, the number of rows can be adjusted on a straight section of the pattern but this should only be attempted if you are a knitter with some experience.

When you have achieved a swatch of the correct measurement, make a note of how much looser or tighter than the suggested tension you needed to set the tension dial. Each time a tension setting is given in the pattern you should adjust your setting by the same amount. e.g. If the suggested tension for a pattern was 6 and you achieved the correct measurements at $6+\frac{2}{3}$ then each time T6 is mentioned in the pattern you would set the dial to $6+\frac{2}{3}$ and for the welts where the pattern suggested T4 you would set the tension dial to $4+\frac{2}{3}$.

It may be helpful to mark the changes of tension on the pattern but only use pencil as, when you use the pattern again, the settings might be different.

TERMS AND TECHNIQUES USED

To decrease (dec):

With the transfer tool move the st to be decreased onto the next needle already holding a st. Push the empty needle back into A position.

To decrease 1 st fully fashioned (dec 1 st ff): Move the 3rd st from the edge onto the 4th needle then move the 2nd and first sts up to fill the empty needles. Push the end needle into A position. This can all be done in one move using the 3 prong transfer tool.

To increase (inc): Pull needle from A position into B position where st is to be increased, then, using the single prong transfer tool, pick up the bar from underneath the next st to right or left and place it onto the empty needle.

To increase 1 st fully fashioned (inc 1 st ff): Using the 3 prong transfer tool move the 3 end sts out by 1 needle. The 4th needle from the end will now be empty. Pick up the bar from under the 5th needle and place it onto the empty needle.

Counting rows worked between inc or dec rows:

When the instructions say "inc (or dec) 1 st at each end of next and every foll 4th row" work as follows:

Move the sts to be inc (or dec) and take the carr across to knit the row — this has completed the "next row" instructions. ★ Work 3 more rows without shaping — these are the 1st, 2nd and 3rd rows. Move the sts for the next inc (or dec) — this is the 4th row. Repeat the 4 rows from ★ until you have the correct number of sts or have worked the required number of incs (or decs). Do not knit the 3 rows after the last shaping unless told to do so.

We have included row and stitch counts throughout the patterns as extra checks.


Unless told otherwise, when working an inc or dec you should always knit the row after moving the sts.

To waste knit:

Use a smooth yarn of similar thickness to the MY but in a contrasting colour. Set for plain knitting and thread WY in feeder A. Knit a few rows (at least 8). Break off WY and remove from feeder A. Take carr across to release knitting from machine. There is no need to cast off.


To knit 1 row with nylon cord:

Thread nylon cord through feeder A leaving a short length hanging below the carr. Support the long end above the carr and take the carr across allowing the cord to run freely through your hand. Remove cord from feeder A.

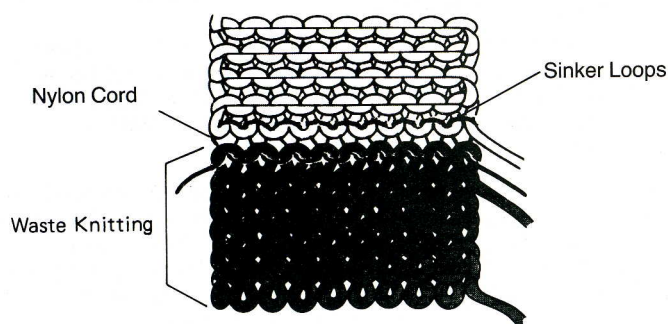


To mark 1 st knitting by hand:

Bring the correct needle forward into HP so that the st slips behind the latch. Hang a short length of WY (approx 15 cm) onto the hook. While holding the ends of the WY pull the needle back into B position so that the st slips over the WY making a new st with the WY.

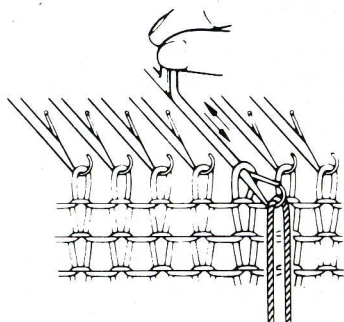

To mark several sts knitting by hand:


Bring required needles forward into HP so that the sts sit behind the latches. Use a length of contrasting WY and place it onto the hook of the first needle and return the needle to WP so that the st passes over the WY to make a new st. Repeat with each needle until all the needles are returned to B position.

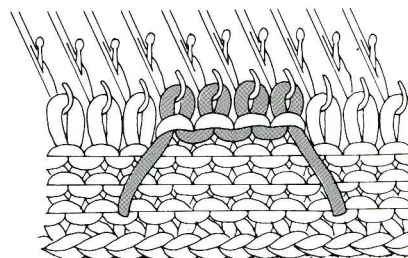

If the next row should be a patterned row, arrange the needles into B position and D position as necessary.

To mark side edge:


Hang a short length of contrasting yarn (approx 15 cm) onto the hook of the end needle together with the st already there. Hold this in place while knitting the next row. This will be caught in the knitting but can easily be removed when the garment is complete. Markers can be placed at either or both ends in one row.

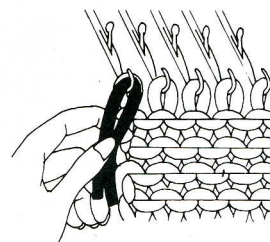

To knit a plain hem:

Bring required number of needles into B position. Using WY, cast on and knit a few rows (at least 7) ending COL. Break off WY. Using nylon cord, knit 1 row.

Thread MY into feeder A, set tension dial for hem (usually 1 number tighter than main tension) and RC to 000. Using MY, knit required number of rows for first half, knit 1 loose row (usually 1 number looser than main tension) for foldline. Return tension dial to hem tension and knit 2nd half of hem.

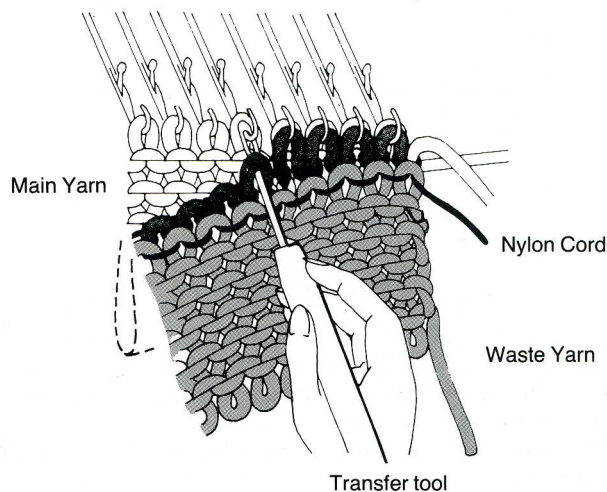


Pick up loops from 1st row knitted in MY.

To knit a 2 x 1 mock rib (SB machines only):


Bring required number of needles into B position then arrange needles for 2 x 1 mock rib by pushing 3rd and every foll 3rd needle back to A position (2 needles in B position and 1 in A position).

Using WY, cast on and knit a few rows (at least 7) ending COL. Break off WY. Using nylon cord, knit 1 row.

Thread MY into feeder A, set tension dial for rib (usually 2-3 numbers tighter than main tension) and RC to 000. Knit the required number of rows for the first half of rib. Turn the tension dial to 1 number looser than the main tension and knit 1 row (this forms the foldline). Return the tension dial to the same number as before and knit the 2nd half of the rib. COL.

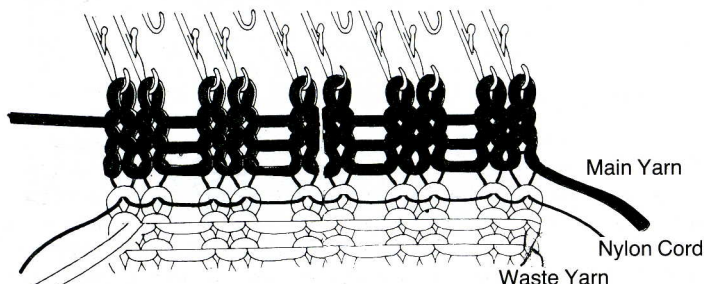

Bring the empty needles from A position to B position. Make a hem by picking up loops from first row knitted in MY. Place the larger loops onto the empty needles and the smaller loops onto the right-hand needle of the pair already holding a st.

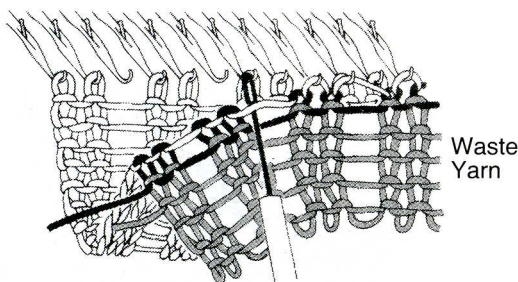

Note: The nylon cord is pulled out to release the WY. This can be done at this stage or after the piece has been removed from the machine.

To knit a 1 x 1 rib (DB machines only):

Set racking indicator on 5, Half Pitch Lever to P and Slide Lever to II.

On MB bring into B position no. of needles indicated in pattern. Using 1/1 needle pusher return every alt needle to A position. On ribber bring appropriate needles into B position.

T0/0. Using MY knit 1 row. Insert cast on comb and hang weights. Set for circular knitting and knit 3 rows. (See instruction manual). Set for plain rib, Slide Lever to I. RC to 000. Set tension as given in pattern and knit required no. of rows. Trans sts from ribber onto empty needles on MB. Remove weights and cast on comb. Drop ribber to lowest position. Remove Connecting Arm Assembly and replace Sinker Plate Assembly ready to work on MB only.

To set machine for pattern:

Group A machines only: Insert card and lock on row 1. Set Change Knob to KC and knit 1 row. Needles will be arranged for 1st row of pattern. Release card. Press Cam Buttons and use colours as instructed in pattern.


Group B machines only: For Fair Isle patterns only set Change Knob on Carr and Change Lever on bed to MC. Knit 1 row. All needles will go to DI position. Set carr as given in patt chart.

For all other st patterns, knit 1 row. Set carr as given in patt chart.

Group C machines only: With carr outside Turn Mark insert Mylar Sheet. Set Pattern Variations Switches and enter numbers as given in pattern. Set Change Knob to KC 1 or 2. Press CF button and knit 1 row. Needles will be arranged for first row of pattern. Press Cam Buttons and use colours as instructed in pattern.

To replace sts from waste knitting:

Fold waste knitting to knit side of work so that the last row knitted in MY is at the top. With right or wrong side of work facing as instructed in pattern, insert the single prong transfer tool through first loop in MY and hook it onto the correct needle.

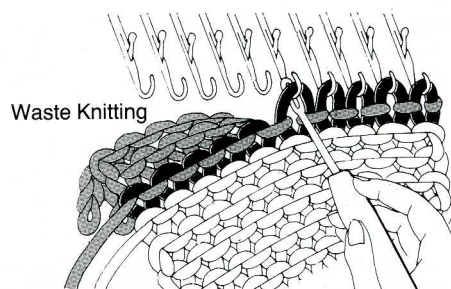


Repeat for each st until all the sts have been returned to the machine. The WY can be unravelled at this stage or removed later. If the WY will not come away freely, clip the strands every few sts before removing.

To pick up stitches:

With right or wrong side of work facing as instructed in pattern, insert single prong transfer tool into knitting at right-hand end of sts to be picked up and place on first needle in B position. Do not try to pick up a single bar but always pick up a complete st in order to avoid leaving a hole when the next row has been knitted.

To space sts evenly it is advisable to pick up 2 or 3 sts at the right-hand side, then 2 or 3 sts at the left-hand side. (It may be necessary to stretch work in order to do this.) The remainder can be picked up in sections, picking up the middle sts before those at each side.

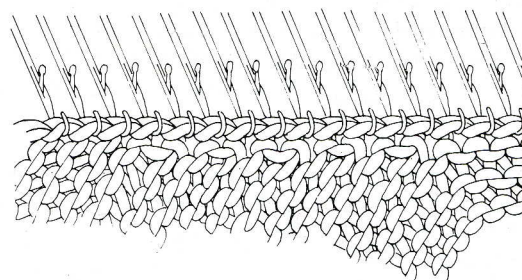


Pull the needles into HP while holding the work back close to the machine. The machine can cope with the extra thickness of the picked up sts more easily when knitting back from HP.

To hold sts on nylon cord:

This method of holding sts should be used when dividing work and working on only one set of sts at a time.


Bring needles to be held into HP so that sts sit behind the latches. Use the nylon cord to knit each st by hand but taking the needles right back into A position making a long st with the nylon cord.

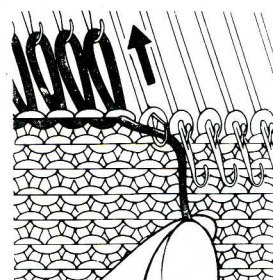

To prevent the brushes under the carr rubbing up the knitting held on the cord, use a spare length of knitting (e.g. the side of a tension swatch) and place the side edge over the sinker hooks in front of the knitting held on the nylon cord.

To return sts to needles from cord:

Remove the spare knitting from the sinker hooks. Return the sts onto the needles by gently pulling the nylon cord until the hooks are level with the sinker hooks and the cord is tight in the needle hooks. Then pull the cord upwards slightly so that the sts from the last row in MY are lifted onto the hooks and the cord released.

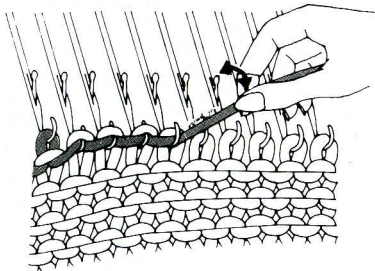

If the knitting is patterned the needles should be arranged into B position and D position as necessary before the next row is knitted.

To hold sts using HP:

Bring required needles into HP while holding knitting close to the machine. Adjust the carr so that these needles will not knit as follows:

Groups A and C machines only: Move Holding Cam Lever to the H position. Needles in HP (E position) will not knit. Those in B position and those in D position will knit.

Group B machines only: Move the Holding Cam Levers at right and left to position II or III. When the Holding Cam Levers are set on II the needles in HP (E position) will not knit but those in C, DI or DII positions and those in B position will all knit. When the Holding Cam Levers are set on III the needles will not knit in HP or D position.


To knit needles down from HP:

To knit all the sts down from HP return Holding Cam Levers to N (I for 710 users).

To leave some needles in HP while knitting the rest, push required needles from HP to D position and set Holding Cam Levers on H (II for 710 users).

To shape using HP:

The needles should only be brought into HP at opposite end of work to carr **except** when only 1 needle is to be brought into HP. When the row has been knitted the yarn goes over the needles in HP to the carr. Pick up this yarn and guide it under the first needle in HP and over the other needles.

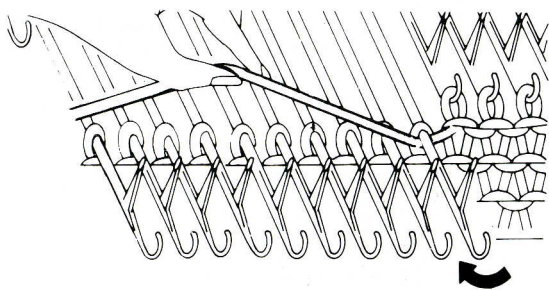

This wrapping of the first needle in HP prevents a hole forming in the finished work.

To automatically wrap the first needle:


Bring 1 needle into HP at carr end. The yarn goes over this needle before knitting the row and has a similar effect to wrapping the yarn under the first needle. This method of wrapping the first needle is usually used when shaping necklines using HP. The instructions for each pattern will indicate which method is to be used.

BUTTONHOLES

Poor buttonholes can spoil the appearance of a garment. Before starting a garment requiring buttonholes it is a good idea to practice making the appropriate buttonhole with spare yarn.

To make buttonhole in 1 x 1 rib on DB machines:


The buttonhole should be made over 2 needles, 1 on the main bed and the other next to it on the ribber. Each st should be moved onto its next needle on the opposite bed, the right-hand st moving to the right and the left-hand st moving left, as shown in diagram. Leave the empty needles in WP.

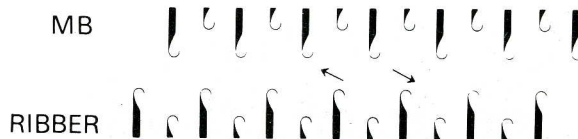

To make buttonholes in a horizontal st st band:

Stocking stitch bands are always worked double to prevent them curling, therefore the buttonholes are worked in two sections. Knit to row where buttonholes are to be placed. Bring sts for each buttonhole into HP. Mark these sts by knitting them by hand using a spare length of contrasting WY. Continue band to place where buttonholes are to be finished.


To complete buttonholes, bring forward to D position the needles required for buttonholes plus 1 extra needle to the left of each buttonhole. Using the single prong transfer tool pick up the sinker loops (above the WY) and place onto the hooks of the needles in D position.

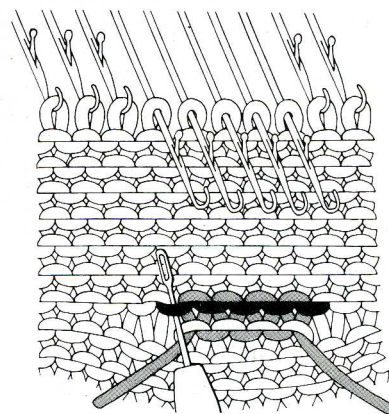

Slip the back sts over the front ones by pushing each needle forward so that the back st sits behind the latch while the front st still sits on the hook. Pull the needle back so that the back loop slips over the front one.

Cast off the buttonhole sts (not the extra st) as follows:

Counting from right, trans 2nd st to first needle then trans both sts back to 2nd needle. Cast st off by slipping back st over front st as before. Trans the 3rd st to 2nd needle then trans both sts back to 3rd needle and cast off this st. Cont in this way until the correct number of sts have been cast off.

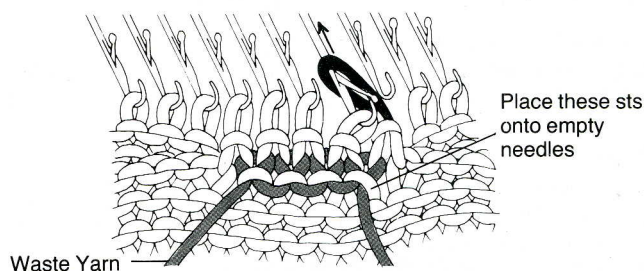

Fill the empty needles by picking up the sts from under the WY and placing them onto the needles. The buttonholes are complete. The WY should be removed after the band has been taken off the machine.

To make buttonholes in a horizontal 2 x 1 mock rib band:

These buttonholes are very similar to those made in a st st band. Mark the 2 sts for the buttonholes on the appropriate row by knitting the sts by hand using a spare length of contrasting WY. Cont band to place where buttonholes are to be finished. Bring the 2 buttonhole needles and the empty needle at each side of them into D position (4 needles in D position for each buttonhole). Pick up the sinker loops above the WY and place them onto the needles as follows:

The larger loops should go onto the empty hooks while the smaller loop should go onto the right-hand needle of those already holding a st and this needle should be pulled back so that the back st slips over the front loop.

Cast off the 4 buttonhole sts as follows:




Counting from right, trans 2nd st to first needle then trans both sts back to 2nd needle. Cast st off by slipping back st over front st as before. Trans the 3rd st to 2nd needle then trans both sts back to 3rd needle and cast off this st. Cont in this way until 4 sts have been cast off. Return the 2 outer needles into A position. Pick up the sts from under the WY and put them onto the 2 needles left in B position. The buttonhole is complete. The WY should be removed after the band has been taken off the machine.

To make buttonholes in a vertical st st band:

Knit to row where buttonholes are required. Mark buttonholes by using WY to knit by hand the sts for the buttonhole as given in the pattern. There will always be 2 sets of sts on 1 row for each buttonhole.

Cont with band, marking buttonholes as required. The buttonholes will be completed after the band has been removed from the machine.

Lightly press band to lock sts in place. Fold band in half lengthwise so that buttonholes are placed together. Remove waste yarn. Slip sts onto needles to hold them. Using a matching length of yarn sew all round the buttonholes as shown in the diagrams.

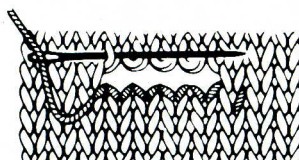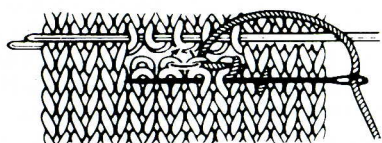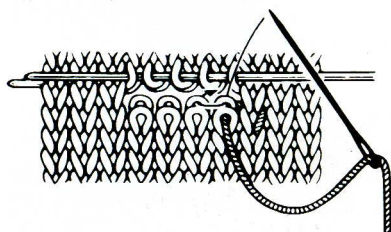**To join shoulder seams:**

Bring into B position the No of needles given in the pattern.

With right side of Right Front facing replace sts held on WY for shoulder onto needles in B position. Unravel waste knitting. With wrong side of Back facing replace the sts held on waste knitting for the same shoulder onto same needles.

The waste knitting from Back can be unravelled now or after casting off.

Set carr for plain knitting and with tension dial set as given for main tension in pattern, knit 1 row. Cast off loosely.

To join shoulder seams and cast off back neck:

Bring into B position the No of needles given in the pattern.

With right side of Right Front facing, and starting at the left, replace the sts held on WY for shoulder onto the needles in B position. Unravel waste knitting.


With right side of Left Front facing and starting at the right replace the sts for left shoulder, leaving needles in the centre without sts for back neck. Unravel waste knitting.

With wrong side of Back facing replace all sts held on WY onto needles in B position so that back shoulder sts are on top of front shoulder sts. The waste knitting from Back can be unravelled now or after casting off.

Using MY and with tension dial set at main tension, knit 1 row. Cast off all sts loosely.

FINISHING**To pin (block out) to size:**

Pull ribs lengthwise to set into shape. Pull mock ribs and hems into shape by inserting a clean ruler into the hem and pulling lengthwise. Using the size chart given with pattern as a guide, pin out each piece to size omitting ribs.

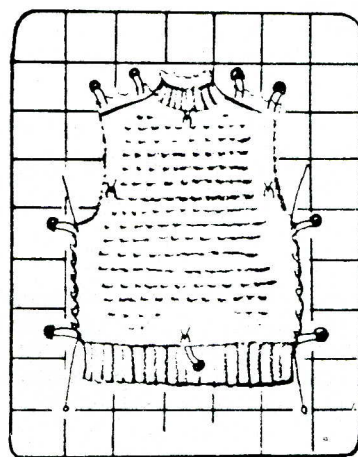

Press according to manufacturers instructions or as follows:

Natural fibres (e.g. wool or cotton):

Cover with a damp cloth or use a steam iron on a moderate heat setting. Hold the iron just above the fabric so that the steam will penetrate the fibres but no weight rests on the knitting. Do not steam ribs. Leave pinned out until dry.

Synthetic fibres (e.g. acrylics)

DO NOT USE AN IRON. Cover piece with a damp cloth or spray lightly with water and leave until dry.

IF IN DOUBT, DO NOT PRESS.


To sew up:

Using the correct sts to sew up helps to give a garment that professional look. Mattress st should be used where possible as it is almost invisible when worked correctly. Back st is used for some seams where the shape or yarn makes mattress st difficult. Slip st is used where pieces are only lightly held in position.


Mock ribs should never be sewn through the double thicknesses. Using mattress st, sew down the wrong side first then round fold and up the right side.

Mattress stitch:

This is worked from the right side of the work with the pieces placed side by side. Use tapestry needle and start from the top or bottom edge. Starting one st in from the edge, work as follows: Run the yarn under threads of 1st and 2nd rows of left-hand piece then run the yarn under threads of 2nd and 3rd rows of right-hand piece. Take the yarn under 3rd and 4th rows of left-hand piece. Cont taking threads from each side for approx 3 cm. Pull the yarn up just firmly enough to close the two edges together. Repeat until the seam has been completed.

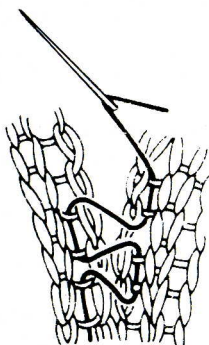
**Slip stitch:**

Work from the wrong side using a tapestry needle and matching yarn. Starting from the right take a small st from the main fabric and one from the edge of the hem at the same time. Pull the thread up gently so that the fabric keeps its elasticity.

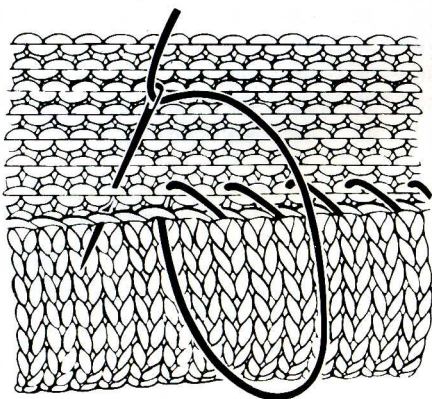**Back stitch:**

With right sides of work together, work from right to left using matching yarn and a tapestry needle. Work approx one st or row in from the edge.


Working through both thicknesses, bring the needle up through 2nd st or row along the line to be stitched. Take needle down through first st or row and up through 3rd st or row. Cont to end of seam and fasten off.

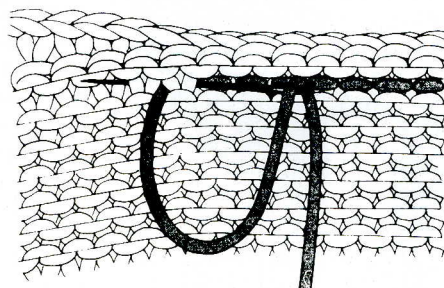**To back stitch through open loops:**

This method is used to give a neat, elastic and decorative finish which is worked on the right side. The work is finished off at the same time as it is sewn in place.


Remove WY or if preferred fold it out of the way. Place loops to be back stitched over right side of work in correct position and pin or tack in place. Using matching yarn and a tapestry needle and starting at the right, work as follows:

Bring needle up through 2nd open loop. Take a st down through first loop and up through 3rd loop. Do not pull thread too firmly. Take the next st down through the 2nd loop again and up through the 4th loop. Cont in this way until all the loops are held in place.

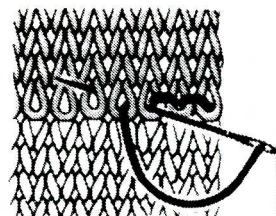

1 FAMILY SWEATERS WITH ROUND OR V NECK

Illustrated in BRAMWELL Fine 4 ply shades 373, white, 320, and 460.

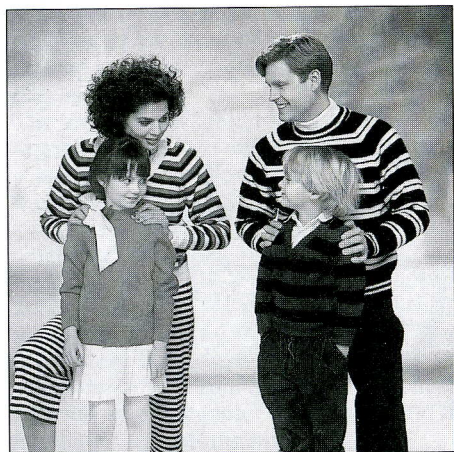

Techniques required to knit this pattern include:

ribs (for DB machines only)
mock rib (for SB machines only)
waste knitting
decreasing
decreasing fully fashioned
increasing
holding sts using nylon cord
picking up sts
replacing sts from waste knitting
finishing

Family Raglan Sweaters with a choice of neckline and knitted in a single colour or in a variety of stripe patterns. Instructions are given for One Colour Sweaters with the instructions for the alternative striped versions at the end of the pattern.

MACHINES

Groups A, B and C.

MATERIALS

BRAMWELL Fine 4 ply 500g cones.

One colour Round Neck Sweater (shown as Girl's Sweater)

One colour 'V' Neck Sweater (not shown)

Stripe Pattern 1 (shown as Lady's Sweater)

Stripe Pattern 2 (shown as Boy's Sweater)

Stripe Pattern 3 (shown as Man's Sweater)

1 cone for all sweaters.

1 cone for all sweaters.

1 cone each Col A (White), Col B (Navy) and Col C (Rose) for all sweaters.

1 cone each Col A (Green) and Col B (Navy) for all sweaters.

1 cone each Col A (Navy) and Col B (White) for all sweaters.

MEASUREMENTS

To fit chest/bust

Actual measurement

Length from back neck

Sleeve length

24	26	28	30	32	34	36	38	40	42	44	inch
61	66	71	76	81	86	91	97	102	107	112	cm
68	74	80	86	90	96	102	108	114	118	122	cm
43	46	50	52	57	61	63	66	67	69	70	cm
27	31	35	39	43	44	45	46	47	47	48	cm

TENSION

St st — 40 sts = 13.9 cm and 60 rows = 15.2 cm, (approx 29 sts and 39 rows = 10 cm square) approx T6 $\frac{2}{3}$.

RIBS

DB machines: 1 x 1 pitch setting, T2/2, or SB machines: 2 x 1 mock rib, T3 $\frac{2}{3}$.

ONE COLOUR ROUND NECK SWEATER

BACK

Bring into B position

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T3 $\frac{2}{3}$, using MY, knit

T8, knit 1 row. T3 $\frac{2}{3}$, knit

Make a hem.

T6 $\frac{2}{3}$, knit 1 row. COR.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY.

RC 000. T2/2, in rib knit

COR. Trans sts to MB.

All machines: For 1st, 4th, 5th, 7th, 10th and 11th sizes only

inc 1 st at both ends of work. For 2nd size only inc 1 st at left side

of work. Do not knit row

RC 000. T6 $\frac{2}{3}$, knit until RC reads

ending with COR.

Shape raglans


RC 000. At beg of next 2 rows cast off

Dec 1 st ff at each end of next and every foll 3rd row until

then every foll alt row until

98	107	116	122	128	140	146	158	164	170	176	needles.
24	24	24	28	28	28	28	32	32	32	32	rows.
24	24	24	28	28	28	28	32	32	32	32	rows.
24	24	24	28	28	28	28	32	32	32	32	rows.
100	108	116	124	130	140	148	158	164	172	178	sts.
78	82	90	90	102	114	118	118	118	120	120	
5	5	6	6	6	6	7	7	7	8	8	sts.
84	92	98	106	108	122	128	138	144	150	156	sts rem,
26	28	28	30	30	34	36	40	40	42	44	sts rem,

ending COR. RC reads	68	74	80	86	94	98	102	108	114	118	122.
Waste knit.											
FRONT											
Work as given for Back until	46	48	48	50	54	58	60	68	68	70	72 sts rem
in raglan shaping, ending COR. RC reads	48	54	60	66	70	74	78	80	86	90	94.
Shape neck											
Counting from the left, using nylon cord, place into A position	29	31	31	33	35	38	40	44	44	46	47 needles.
★ Keeping raglan decs correct and using nylon cord, place 1 st at neck edge into A position on every row until	4	4	4	4	5	4	4	5	5	5	5 sts rem
in B position. Keeping neck edge straight, cont to shape raglan until 2 sts rem, and RC reads	62	68	74	80	86	90	94	100	106	110	114.
Cast off.											
COR. Reset RC to	48	54	60	66	70	74	78	80	86	90	94.
Counting from the left return	17	17	17	17	19	20	20	24	24	24	25 sts
to B position from nylon cord. Rejoin MY and complete as given for first side from ★ to end.											
Bring sts held on nylon cord to B position. Using MY, knit 1 row.											
Waste knit.											
RIGHT SLEEVE											
Bring into B position	50	53	53	56	56	59	62	62	65	65	68 needles.
Work rib as given for Back. COR.											
All machines: RC 000. T6 $\frac{2}{3}$, knit 2 rows. Inc 1 st at each end of next and every foll	6th	6th	4th	4th	4th	4th	4th	4th	4th	4th	4th row
until there are	70	73	59	62	62	71	84	102	107	125	138 sts.
RC reads	57	57	11	11	11	23	43	79	83	119	139.
Inc 1 st at each end of every foll	8th	8th	6th	6th	6th	6th	6th	6th	6th	6th	6th row
until there are	74	81	91	96	102	109	116	122	127	133	142 sts.
Cont straight until RC reads	82	98	114	124	140	144	148	148	152	152	156.
Shape raglan											
RC 000. At beg of next 2 rows cast off	5	5	6	6	6	6	7	7	7	8	8 sts.
Dec 1 st ff at each end of next and every foll 3rd row until	28	35	47	48	54	65	70	76	77	81	98 sts rem.
Knit 2 rows. RC reads	56	56	50	56	56	50	50	50	56	56	44.
Dec 1 st ff at each end of next and every foll alt row until	22	23	23	24	24	25	26	26	27	27	28 sts rem,
ending COR. RC reads	62	68	74	80	86	90	94	100	106	110	114.
Shape top ★★											
Counting from the left, place	12	13	13	14	11	12	13	13	14	14	15 needles
into A position using nylon cord.											
Cont raglan decs at right-hand side AT THE SAME TIME using nylon cord, place 1 needle at left into A position on every row until 2 needles rem in B position.											
RC reads	68	74	80	86	94	98	102	108	114	118	122.
Bring the	19	20	20	21	20	21	22	22	23	23	24 sts
held on nylon cord to B position. Knit 1 row. Waste knit.											
LEFT SLEEVE											
Work as given for Right Sleeve to ★★.											
Dec 1 st ff at left-hand side only on next row. COL.											
Counting from the right, place	13	14	14	15	12	13	14	14	15	15	16 needles
into A position using nylon cord. Knit 1 row.											
Cont raglan decs at left-hand edge, AT THE SAME TIME place 1 needle at right into A position on every row until 2 needles rem in B position. RC reads	68	74	80	86	94	98	102	108	114	118	122.
Complete as given for Right Sleeve.											
NECKBAND											
Join front and right back raglan seams using mattress st.											
Bring into B position	104	110	110	116	116	125	131	143	146	149	152 needles.
SB machines only: Arrange needles for 2 x 1 mock rib.											
RC 000. T3 $\frac{2}{3}$, using MY, knit 12 rows. T8, knit 1 row. T3 $\frac{2}{3}$, knit 12 rows. Make hem but do not knit row. COL.											
All machines: With wrong (purl) side of work facing place sts from Back, Right Sleeve, Front and Left Sleeve onto needles in B position, picking up an equal number of sts each side of front neck.											
While holding work close to machine, bring needles into HP. T8, knit 1 row. Cast off very loosely.											
TO MAKE UP											
Pin out to size following measurements on diagram. Press according to manufacturers instructions.											
Join left back raglan and neckband seams using mattress st.											
Join side and sleeve seams using mattress st.											

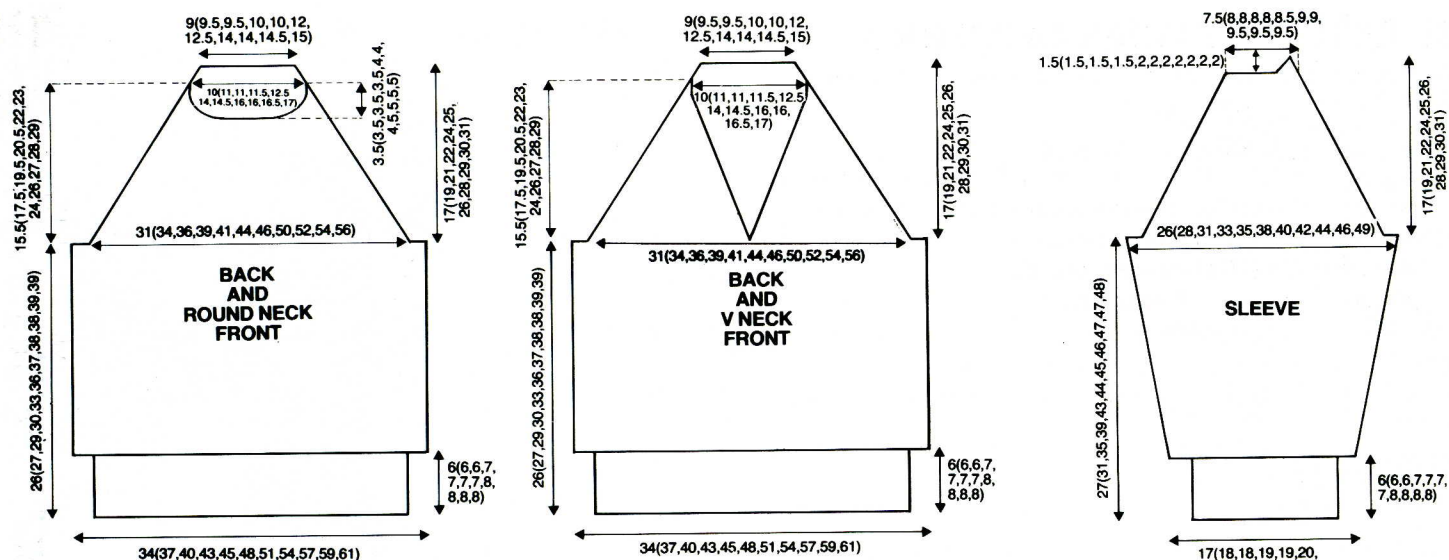

ONE COLOUR V NECK SWEATER

BACK AND SLEEVES

Work as given for Round Neck Sweater.

FRONT

Work as given for Back of Round Neck Sweater until RC reads . . . 78 82 90 90 102 114 118 118 118 120 120
ending with COR.

Shape raglan

RC 000. At beg of next 2 rows cast off 5 5 6 6 6 6 7 7 7 8 8 sts.

Divide for neck

Counting from the left, using nylon cord, place into A position . . . 45 49 52 56 59 64 67 72 75 78 81 needles.

★★★ Dec 1 st at neck edge on next and every foll 4th row
throughout, AT THE SAME TIME dec 1 st ff at raglan edge on
next and every foll 3rd row until 40 44 47 51 50 59 62 67 70 73 76 sts rem
then every foll alt row until 5 6 9 10 11 9 9 8 11 11 11 sts rem.

Keeping neck edge straight, cont dec at raglan edge until 2 sts
rem, ending COR. RC reads 62 68 74 80 86 90 94 100 106 110 114.

Cast off.

RC 000. COR. Return to B position 45 49 52 56 59 64 67 72 75 78 81 sts

from nylon cord at left-hand side. Rejoin yarn and knit 1 row.

Complete as given for first side from ★★★ to end.

BACK AND RIGHT FRONT NECKBAND

Join front and right back raglan seams using mattress st.

Bring into B position 98 107 110 119 125 131 140 149 155 161 167 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T3½, using MY, knit 12 rows. T8, knit 1 row. T3½, knit
12 rows. Make a hem but do not knit the row. COL.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY. RC 000. T2½, in rib knit 13 rows. COL. Trans sts
to MB.

All machines: With wrong (purl) side of work facing pick up sts
from Back, Right Sleeve and down front neck to point of V and
place them onto needles.

While holding work close to machine, bring needles into HP. T8,
knit 1 row. Cast off loosely.

LEFT FRONT NECKBAND

Bring into B position 74 80 83 89 95 98 104 110 116 119 125 needles.

Work rib as given for Right Front Neckband.

With wrong (purl) side of work facing pick up sts from left front
neck and Left Sleeve and place onto needles.

While holding work close to machine, bring needles into HP. T8,
knit 1 row. Cast off loosely.

TO MAKE UP

Pin out to size following measurements on diagram. Press
according to manufacturers instructions.

Join left back raglan and neckband seams using mattress st.

Place right neckband over left at centre front and sew in place.
Join side and sleeve seams using mattress st.

SWEATER IN STRIPE PATTERN 1

Work as given for One Colour Round or V-Neck Sweater **but** working in colours given below.

BACK AND FRONT

Work ribs using Col A. Work main part in stripe patt as follows:
Using Col B, knit 6 rows. Using Col C, knit 6 rows. Using Col A, knit 6 rows.

Rep these 18 rows throughout for the stripe patt.

SLEEVES

Work ribs using Col A. Work main part in 18 row stripe patt as given for Back and Front **but** starting stripe patt with row

15 3 13 3 17 7 7 7 3 5 1.

Note: This is so that the stripes will match up along the raglan seams.

NECKBAND

Work in Col A.

SWEATER IN STRIPE PATTERN 2

Work as given for One Colour Round or V-Neck Sweater **but** working in colours as given below.

BACK AND FRONT

Work ribs using Col A. Work main part in stripe patt as follows:
Using Col B, knit 16 rows. Using Col A, knit 16 rows.
Rep these 32 rows throughout for the stripe patt.

SLEEVES

Work ribs using Col A. Work main part in 32 row stripe patt as given for Back and Front **but** starting stripe patt with row

29 17 9 31 27 3 3 3 31 1 29.

NECKBAND

Work in Col A.

SWEATER IN STRIPE PATTERN 3

Work as given for One Colour Round or V-Neck Sweater **but** working in colours given below.

BACK AND FRONT

Arrange the needles as given for One Colour Sweaters then work the ribs as follows:

SB machines only: RC 000. T3 $\frac{2}{3}$, using Col A knit
T8, using Col A, knit 1 row.

24 24 24 28 28 28 28 32 32 32 32 rows.

T3 $\frac{2}{3}$, using Col A, knit
Using Col B, knit 4 rows. Using Col A, knit 4 rows. Using Col B, knit 4 rows.

6 6 6 8 8 8 8 10 10 10 10 rows.

Using Col A, knit
Make a hem. T6 $\frac{2}{3}$ knit 1 row.

6 6 6 8 8 8 8 10 10 10 10 rows.

DB machines only: Cast on using Col A.

RC 000. T2/2, using Col A knit
Using Col B, knit 4 rows. Using Col A, knit 4 rows. Using Col B, knit 4 rows.

6 6 6 8 8 8 8 10 10 10 10 rows.

Using Col A knit
Trans sts to MB. COR.

6 6 6 8 8 8 8 10 10 10 10 rows.

All Machines: Complete as given for One Colour Sweaters **but** working in stripe patt as follows:

Using Col A, knit 20 rows. Using Col B, knit 6 rows. Using Col A, knit 2 rows. Using Col B, knit 6 rows.
Rep these 34 rows throughout for stripe patt.

SLEEVES

Work striped rib as given for Back and Front. Work main part in 34 row stripe patt **but** starting stripe patt with row

31 19 11 1 31 5 5 5 1 3 33.

NECKBANDS

Arrange needles as given for neckbands of One Colour Round or V-Neck Sweaters then work in stripe patt as follows:

SB machines only: T3 $\frac{2}{3}$, using Col A, knit 4 rows.
Using Col B, knit 4 rows.

Using Col A, knit 4 rows. T8, knit 1 row. T3 $\frac{2}{3}$, knit 12 rows.
Make a hem but do not knit the row. COL.

All machines: Complete as given for One Colour Sweaters.

DB machines only: Cast on with Col A. RC 000. T2/2, using Col A, knit 4 rows.

Using Col B, knit 4 rows. Using Col A, knit 5 rows. COL. Trans sts to MB.

2 FAMILY TAB FRONT SWEATERS

Illustrated in ARGYLL Lazer shades 564, 394 and 395.



Techniques required to knit this pattern include:

ribs (for DB machines only)
 mock rib (for SB machines only)
 increasing
 decreasing
 waste knitting
 holding sts using nylon cord
 holding sts using HP
 picking up sts
 joining shoulder seams
 buttonholes in 1 x 1 rib (for DB machines only)
 buttonholes in horizontal 2 x 1 mock rib (for SB machines only)
 finishing

MACHINES

Groups A, B and C.

MATERIALS

ARGYLL Lazer 340g cones.

Long sleeved sweater	1	1	1	1	1	1	1	2	2	2	2 cones
Short sleeved sweater	1	1	1	1	1	1	1	1	1	1	1 cone
Buttons	3	3	3	3	3	4	4	4	4	4	4

MEASUREMENTS

To fit chest/bust	24	26	28	30	32	34	36	38	40	42	44 inch
	61	66	71	76	81	86	91	97	102	107	112 cm
Actual measurement	72	76	80	86	92	96	102	108	114	120	124 cm
Length from back neck	45	48	51	53	57	63	64	66	68	70	71 cm
Long sleeve length	31	35	39	43	43	44	44	45	46	47	47 cm
Short sleeve length	7	7	8	8	10	11	11	11	11	12	12 cm

TENSION

St st — 40 sts = 13.4 cm and 60 rows = 15 cm, (approx 30 sts and 40 rows = 10 cm square) approx T6 $\frac{2}{3}$.

RIBS

DB machines: 1 x 1 pitch setting, T3/3, or SB machines: 2 x 1 mock rib, T4 $\frac{2}{3}$.

Note: If preferred Front and Neck Bands can be worked as a plain hem at T5 $\frac{2}{3}$ instead of mock rib.

BACK

Bring into B position 107 113 119 128 137 143 152 161 170 179 185 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T4 $\frac{2}{3}$, using MY, knit 24 24 28 28 28 28 28 32 32 32 32 rows.

T8, knit 1 row. T4 $\frac{2}{3}$, knit 24 24 28 28 28 28 28 32 32 32 32 rows.

Make a hem. T6 $\frac{2}{3}$, knit 1 row. COR.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY. RC 000, T3/3. In rib, knit 24 24 28 28 28 28 28 32 32 32 32 rows.

COR. Trans sts to MB.

All machines: For 2nd, 3rd, 6th, 8th and 11th sizes only inc 1 st at both ends of work. For 4th, 7th and 9th sizes only in 1 st at right-hand side of work. Do not knit row.

107 115 121 129 137 145 153 163 171 179 187 sts.

RC 000. T6 $\frac{2}{3}$. Knit until RC reads 92 100 104 104 112 128 128 128 128 128 128

COR. ★

Shape armholes

RC 000. At beg of next 2 rows cast off 5 5 5 6 6 6 7 7 8 9 10 sts.

Dec 1 st at each end of every row until 79 87 93 99 107 115 121 131 137 139 145 sts rem,

then at each end of every alt row until 75 81 87 93 101 107 111 117 121 123 127 sts rem.

Knit straight until RC reads 56 60 64 72 80 88 92 96 104 112 116.

Shape shoulders

At the opposite end to carr, using the nylon cord, place into

A position 6 6 7 8 8 9 7 7 7 7 8 sts.

Knit 1 row.

* At the carr end place 1 st into A position and at the opposite

end to carr place 6 6 7 8 8 9 7 7 7 7 8 sts

into A position. Knit 1 row. *

Rep from * to *	2	2	2	2	2	2	4	4	4	4	4 times more.
** At the carr end place 1 st into A position and at the opposite end to carr place	5	7	7	7	9	9	6	8	9	9	7 sts
into A position. Knit 1 row. **											
Rep from ** to ** once more.											
At the carr end place 1 st into A position and at the opposite end to carr return	20	22	24	26	28	30	31	33	34	34	35 sts
to B position from nylon cord. Knit 1 row. At the opposite end to carr return	20	22	24	26	28	30	31	33	34	34	35 sts
to B position from nylon cord. Knit 1 row.											
At left hand side bring into HP	55	59	63	67	73	77	80	84	87	89	92 sts.
Waste knit rem	20	22	24	26	28	30	31	33	34	34	35 sts
for shoulder.											
Bring into D position next	35	37	39	41	45	47	49	51	53	55	57 sts.
Waste knit these sts for neckband.											
Waste knit rem	20	22	24	26	28	30	31	33	34	34	35 sts
for shoulder.											
FRONT											
Work as given for Back to ★.											
Divide for front opening											
Using a short length of MY cast off centre	7	7	7	7	7	9	9	9	9	9	9 sts.
Counting from the left and using the nylon cord place into A position	50	54	57	61	65	68	72	77	81	85	89 needles.
★★Shape armhole											
RC 000. At beg of next row cast off	5	5	5	6	6	6	7	7	8	9	10 sts.
Knit 1 row.											
Dec 1 st at armhole edge on every row until	36	40	43	46	50	53	56	61	64	65	68 sts rem,
then on every alt row until	34	37	40	43	47	49	51	54	56	57	59 sts rem.
Knit straight until RC reads	35	39	43	51	55	63	69	73	77	85	89.
Carr at neck edge.											
Shape neck											
At beg of next row cast off	6	6	6	7	7	7	8	8	8	9	9 sts.
Dec 1 st at neck edge on every row until	20	22	24	26	28	30	31	33	34	34	35 sts rem.
Knit straight until RC reads	57	61	65	73	81	89	93	97	105	113	117.
Carr at neck edge.											
Shape shoulder											
* At the opposite end to carr, using nylon cord, place into A position	6	6	7	8	8	9	7	7	7	7	8 sts.
Knit 1 row. At carr end place 1 st into A position. Knit 1 row. *											
Rep from * to * until	6	8	8	8	10	10	7	9	10	10	8 sts rem
in B position ending with carr at neck edge.											
Return sts for shoulder from nylon cord to B position and knit 1 row. Waste knit.											
COR. Bring the	50	54	57	61	65	68	72	77	81	85	89 sts
held on nylon cord into B position. Rejoin MY. T6¾, knit 1 row.											
Complete as given for first side from ★★ to end.											
LONG SLEEVES											
Bring into B position	53	53	56	59	59	62	65	65	71	71	74 needles.
Work ribs as given for Back. COR.											
RC 000. T6¾, knit 6 rows. Inc 1 st at each end of next and every foll	8th	8th	9th	10th	6th	6th	6th	5th	6th	5th	5th row
until there are	75	79	82	87	99	108	111	115	119	123	128 sts.
Knit straight until RC reads	100	116	128	144	144	148	148	148	152	156	156.
COR.											
Shape sleeve head											
RC 000. At beg of next 2 rows cast off	5	5	5	6	6	6	7	7	8	9	10 sts.
Dec 1 st at each end of next and every foll 4th row until	59	63	64	65	77	86	85	87	85	85	86 sts rem,
then on every foll alt row until	39	39	40	39	47	48	49	53	49	43	44 sts rem,
ending COR. Dec 1 st at each end of every row until	23	23	24	27	27	28	29	29	29	31	32 sts rem,
ending COR. RC reads	40	44	48	52	60	68	70	74	82	88	92.
Cast off 3 sts at beg of next 2 rows.											
Cast off rem	17	17	18	21	21	22	23	23	23	25	26 sts.
SHORT SLEEVES											
Bring into B position	65	71	74	77	89	92	95	101	107	107	110 needles.
SB machines only: Arrange needles for 2 x 1 mock rib.											
RC 000. T4¾, using MY, knit	10	10	10	10	12	12	12	12	12	12	12 rows.
T8, knit 1 row, T4¾, knit	10	10	10	10	12	12	12	12	12	12	12 rows.
Make a hem. T6¾, knit 1 row. COR.											

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY. RC 000, T3/3. Knit 10 10 10 10 12 12 12 12 12 12 12 rows.
COR. Trans sts to MB.

All machines: RC 000. T6½, with carr set for plain knitting, inc 1 st at each end of first and every foll 4th row until there are 75 79 82 87 99 108 111 115 119 123 128 sts.
Knit straight until RC reads 20 20 24 24 28 32 32 32 32 36 36.
COR. Shape sleeve head exactly as given for Long Sleeves.

LEFT FRONT NECKBAND

Bring into B position 26 26 29 29 32 32 35 35 38 38 41 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T4½, using MY, knit 10 10 10 10 12 12 12 12 12 14 14 rows.

T8, knit 1 row. T4½, knit 10 10 10 10 12 12 12 12 12 14 14 rows.

COL. Make a hem. Do not knit row.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY. RC 000. T3/3, knit 11 11 11 11 13 13 13 13 13 15 15 rows.

COL. Trans sts to MB.

All machines: With wrong (purl) side of work facing pick up .. 26 26 29 29 32 32 35 35 38 38 41 sts
evenly round left front neck edge and place onto needles in B position.

While holding work close to machine, bring needles into HP.

T6½, knit 1 row. Cast off loosely.

RIGHT FRONT NECKBAND

Work as given for Left Front Neckband but picking up sts round right front neck edge.

BACK NECKBAND

Bring into B position 35 35 38 41 44 47 47 50 53 53 56 needles.

Work rib as given for Left Front Neckband ending COL.

All machines: With wrong (purl) side of work facing, replace the back neck sts held on waste knitting onto the needles in B position dec 0 2 1 0 1 0 2 1 0 2 1 sts.

Bring needles into HP. T6½, knit 1 row. Cast off loosely.

BUTTONHOLE BAND

Bring into B position 35 38 41 47 50 56 62 65 71 77 80 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T4½, using MY knit 7 7 7 7 7 8 8 8 8 8 8 rows.

Counting from right for Lady's Sweater or left for Man's Sweater and including needles in A position, mark 3 3 3 3 3 4 4 4 4 4 4

buttonholes, marking the first over 7th and 8th needles, and leaving 10 10 13 16 16 13 13 16 16 19 19 needles
between each buttonhole.

Knit 7 7 7 7 7 8 8 8 8 8 8 rows.

T8, knit 1 row. T4½, knit 7 7 7 7 7 8 8 8 8 8 8 rows.

Complete buttonholes then knit until RC reads 29 29 29 29 29 33 33 33 33 33 33.

Bring empty needles to B position and make hem. Do not knit row.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Cast on with MY. RC 000. T3/3, knit 7 7 7 7 7 8 8 8 8 8 8 rows.

Counting needles in B position on both beds and starting at right for Lady's Sweater or left for Man's Sweater, make 3 3 3 3 3 4 4 4 4 4 4

buttonholes, making the first buttonhole over 7th and 8th needles and leaving 10 10 13 16 16 13 13 16 16 19 19 needles
in B position between each buttonhole.

Knit until RC reads 15 15 15 15 15 17 17 17 17 17 17.

Trans sts to MB.

All machines: With wrong (purl) side of work facing, pick up and place onto needles in B position 35 38 41 47 50 56 62 65 71 77 80 sts
from right side of front opening for Lady's Sweater or along left side of front opening for Man's Sweater, working through double thickness of neckband.

While holding work close to machine bring needles into HP. T6½, knit 1 row. Cast off.

BUTTON BAND

Work as given for Buttonhole Band but omitting buttonholes.


TO MAKE UP

Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Shoulder seams


Bring into B position 20 22 24 26 28 30 31 33 34 34 35 needles.
Replace the sts for left shoulder from back and front onto needles in B position, knit 1 row and cast off together. Repeat for right shoulder.

Sew up neckband using mattress st. Sew in sleeves using back st, matching centre of sleeves heads to shoulder seams. Join side and sleeve seams using mattress st. Sew ends of Buttonhole Band to cast off sts at centre front and catch Button Band in place behind it. For SB machines close ends of bands. Sew on buttons.

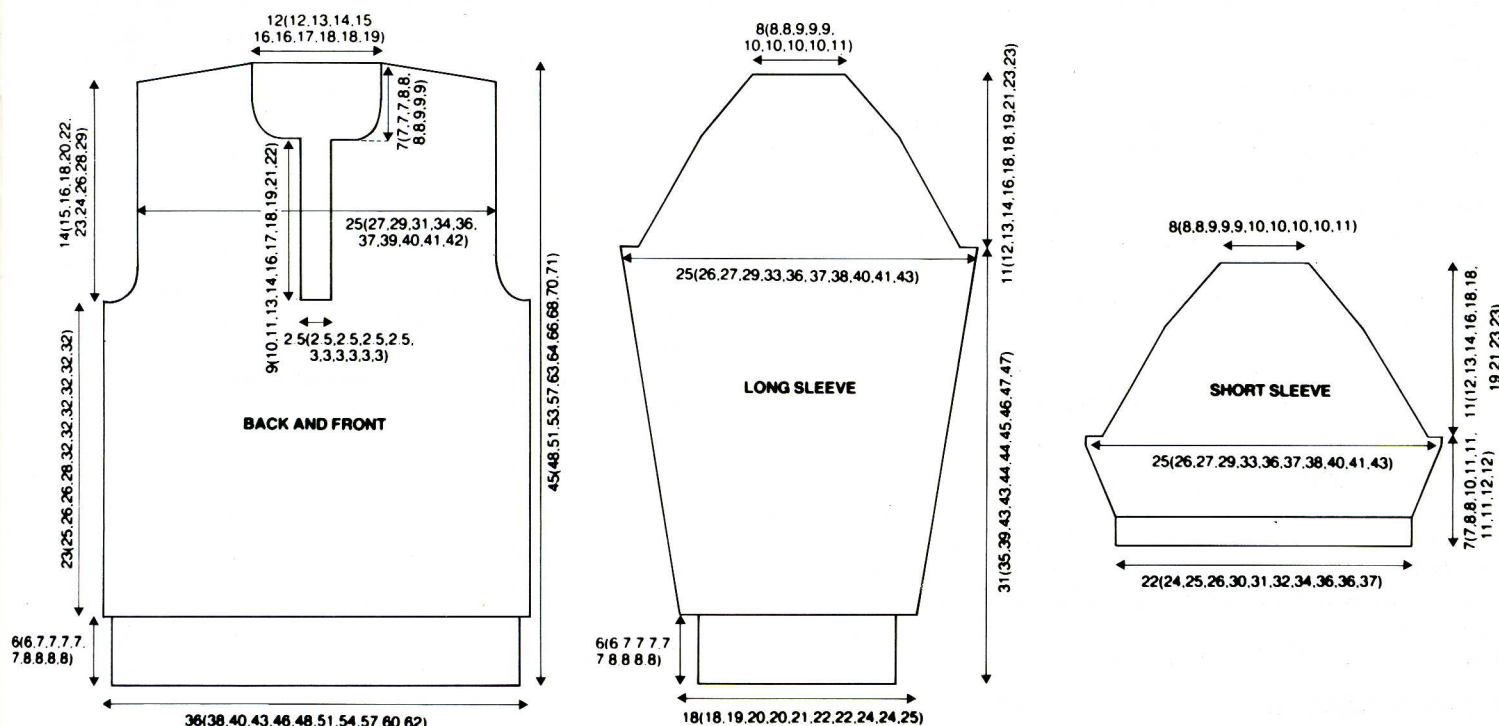

3 FAMILY CARDIGANS WITH ROUND OR V NECK

Illustrated in BRAMWELL Fine 4 ply shades White, 320, MN3, 460, 325, 344 and Black.

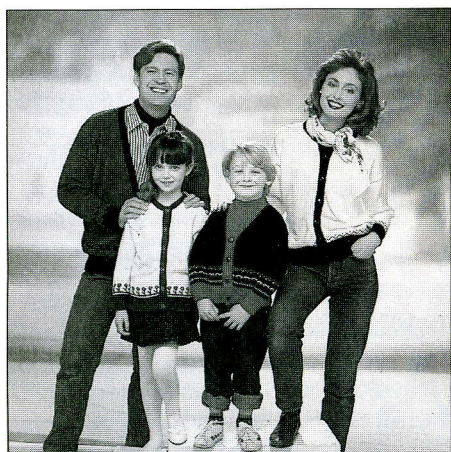

Techniques required to knit this pattern include:

ribs (for DB machines only)
 mock rib (for SB machines only)
 setting for pattern
 increasing
 decreasing
 marking side edges
 waste knitting
 picking up sts
 joining shoulders and casting off back neck
 buttonholes in 1 x 1 rib (for DB machines only)
 buttonholes in vertical bands (for SB machines only)
 finishing

This pattern gives instructions for Cardigans in a wide range of sizes with a choice of neckline and borders. Instructions are given for One Colour Cardigans. Details for Border Pattern Cardigans are given at the end of the pattern.

MACHINES

Groups A, B and C.

MATERIALS

BRAMWELL Fine 4 ply 500g cones.

One Colour Round or V Neck Cardigan (not shown) 1 cone for all cardigans.
Border Pattern 1 (shown as Lady's Cardigan) 1 cone each Col A (Navy) and Col B (White) for all cardigans.
Border Pattern 2 (shown as Man's Cardigan) 1 cone each Col A (Black), Col B (Grey) and an oddment of Col C (Green) for all cardigans.

Border Pattern 3 (shown as Girl's Cardigan)	1 cone each Col A (Green), Col B (White) and an oddment of Col C (Red) for all cardigans.										
Border Pattern 4 (shown as Boy's Cardigan)	1 cone each Col A (Red), Col B (Navy) and oddments of Col C (Green) and Col D (Yellow) for all cardigans.										
Buttons for Round Neck Cardigan	6	6	6	7	7	7	7	8	8	8	8
Buttons for V Neck Cardigan	4	4	4	4	4	5	5	5	5	5	5

MEASUREMENTS

To fit chest/bust	24	26	28	30	32	34	36	38	40	42	44 inch
	61	66	71	76	81	86	91	97	102	107	112 cm
Actual measurement	73	79	84	91	95	100	107	112	119	124	128 cm
Length from back neck	44	47	50	53	56	61	63	66	69	71	73 cm
Sleeve length	31	35	39	43	46	46	46	47	48	50	51 cm

TENSION

St st — 40 sts = 13.9 cm and 60 rows = 15.2 cm, (approx 29 sts and 39 rows = 10 cm square) approx T6¾.

RIBS

DB machines: 1 x 1 pitch setting, T2/2, or SB machines: 2 x 1 mock rib, T3¾.

Notes: When working front bands using a DB machine on T2/2: 60 rows = 13.8 cm. If the correct tension is not obtained the bands will not fit. Remember the amount of weight used can affect the tension.

The Fronts are worked to the left or right of the needle bed so that when a border patt is knitted it will match up at the side seams. When working on one side of the machine, make sure that the carr travels far enough to operate the row counter and pattern mechanism.

ONE COLOUR ROUND NECK CARDIGAN

BACK

Bring into B position

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T3¾, using MY, knit

T7¾, knit 1 row. T3¾, knit

Make a hem. T6¾, knit 1 row. COR.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Using MY cast on. RC 000. T2/2, knit

COR. Trans sts to MB.

All machines: For 1st, 4th, 7th and 9th sizes only inc 1 st at both

ends of work. For 2nd, 5th, 8th, 10th and 11th sizes only inc 1 st

at right-hand side of work. Do not knit row

RC 000. T6¾, knit until RC reads

Place a WY marker at both edges of work.

Knit until RC reads

Waste knit.

RIGHT FRONT

Working at the right hand side of machine and starting at

needle no

to the right of centre 0 bring into B position

Work rib as given for Back. COR.

For 1st, 4th, 7th and 9th sizes only inc 1 st at right-hand side of

work. For 2nd, 5th, 8th, 10th and 11th sizes only inc 1 st at both

ends of work. Do not knit row ★

RC 000. T6¾, knit until RC reads

Place a WY marker at right-hand edge. Knit straight to RC

COL.

★★Shape neck

At beg of next row cast off

Dec 1 st at neck edge on every row until

Knit straight until RC reads

Waste knit

LEFT FRONT

Working at the left hand side of machine and starting at needle no.

to left of centre 0 bring into B position

Work rib as given for Back. COR.

For 1st, 4th, 7th and 9th sizes only inc 1 st at left-hand side of

work. For 2nd, 5th, 8th, 10th and 11th sizes only inc 1 st at both

ends of work. Do not knit row ★★★

RC 000. T6¾, knit until RC reads

Place a WY marker at left edge of work. Knit until RC reads ...

COR. Complete as given for Right Front from ★★ to end.

SLEEVES

Bring into B position 53 53 56 56 59 59 62 65 68 71 74 needles.
 Work ribs as given for Back. COR.
 RC 000. T6½, knit 2 rows. Inc 1 st at each end of next and every
 foll 4th row until there are 99 105 110 116 123 127 134 139 144 151 156 sts.
 Knit straight until RC reads 98 114 128 140 152 152 152 156 164 168.
 Cast off.

NECKBAND

Shoulder seams

Bring into B position 103 111 119 127 135 143 151 159 169 177 183 needles.
 Join shoulder seams and cast off back neck at the same time.
 Bring into B position 98 98 101 104 113 116 122 128 140 143 146 needles.
SB machines only: Arrange needles for 2 x 1 mock rib.
 RC 000. T3¾, using MY, knit 10 10 10 10 10 12 12 12 12 12 12 rows.
 T7¾, knit 1 row. T3¾, knit 10 10 10 10 10 12 12 12 12 12 12 rows.
 Make a hem but do not knit row. COL.
DB machines only: Arrange needles for 1 x 1 rib pitch setting.
 Cast on with MY. RC 000. T2/2, knit 11 11 11 11 11 13 13 13 13 13 13 rows.
 Trans sts to MB.
All machines: With wrong (purl) side of work facing, from left
 front neck, pick up 32 32 32 33 36 37 38 39 44 45 45 sts,
 from back neck pick up 34 34 37 38 41 42 46 50 52 53 56 sts,
 from right front neck pick up 32 32 32 33 36 37 38 39 44 45 45 sts
 and place onto needles in B position.
 While holding work close to machine bring needles into HP.
 T7¾, knit 1 row. Cast off.

BUTTON BAND

Bring into B position 18 needles.
SB machines only: Bring 18 needles into HP then, using main
 yarn, COBH.
 RC 000. T5¾, knit until RC reads 152 168 178 192 198 216 222 228 244 250 258.
 Cast off.
DB machines only: Arrange needles for 1 x 1 rib pitch setting.
 Using MY cast on.
 RC 000. T2/2, knit until RC reads 168 182 192 198 210 234 240 256 264 270 278.
 Trans sts from ribber to empty needles on main bed and cast off.

BUTTONHOLE BAND

Work as given for Button Band until 6 rows have been worked.
SB machines only: * Counting from the right mark buttonholes
 over 4th, 5th and 6th and 13th, 14th and 15th needles.
 Knit 28 31 33 30 31 34 35 31 33 34 35 rows*.
 Rep from * to * 5 5 5 6 6 6 6 7 7 7 7 times more.
 Knit straight until RC reads 152 168 178 192 198 216 222 228 244 250 258.
 Cast off. Finish off buttonholes by hand.
DB machines only: ** Trans the sts for a buttonhole over the centre
 2 sts.
 Knit 31 34 36 31 33 37 38 35 36 37 38 rows**.
 Rep from ** to ** 5 5 5 6 6 6 6 7 7 7 7 times more.
 Knit straight until RC reads 168 182 192 198 210 234 240 256 264 270 278.
 Cast off as given for Button Band.

TO MAKE UP

Pin out to size following measurements on diagram. Press
 according to manufacturers instructions.
 Place centre of cast off edge of sleeve to shoulder seam and sew
 sleeve in place between markers using back st. Join side and
 sleeve seams using mattress st. Sew buttonhole band in place up
 right front for Lady's Cardigan or left front for Man's Cardigan to

top of neckband using mattress st. Sew button band in place. Fold
 st st band only in half to wrong side, slip st in place then close
 ends. Sew on buttons.

ONE COLOUR V NECK CARDIGAN

BACK AND SLEEVES

Work as given for Round Neck Cardigan.

RIGHT FRONT

Work as given for Right Front of Round Neck Cardigan to ★ ... 51 55 59 63 67 71 75 79 84 88 91 sts.
 ★★ RC 000. T6¾, knit until RC reads 66 70 70 70 78 92 94 98 102 102 102.
Shape neck
 Cont as given below AT THE SAME TIME, place WY marker at
 right edge when RC reads 82 90 98 102 110 126 128 132 140 144 148.

Dec 1 st at neck edge on next and every foll	4th	4th	5th	5th	5th	5th	5th	4th	5th	5th	5th row
until	38	50	43	48	51	55	57	77	62	66	71 sts rem,
then every foll	5th	5th	6th	6th	6th	6th	6th	5th	6th	6th	6th row
until	34	38	41	44	47	50	53	55	59	62	64 sts rem.
Knit straight until RC reads	148	160	172	180	192	212	218	226	238	246	254.
Waste knit.											

LEFT FRONT

Work as given for Left Front of Round Neck Cardigan to ★★★ . Complete as given for Right Front from ★★★ to end, reversing all shaping and placing WY marker at left edge.

51 55 59 63 67 71 75 79 84 88 91 sts.

FRONT BAND

Bring into B position 18 needles.

SB machines only: Bring 18 needles into HP then, using main yarn, COBH.

RC 000. T5 $\frac{2}{3}$, knit 6 rows.

* Counting from the right mark buttonholes over 4th, 5th and 6th, and 13th, 14th and 15th needles.

Knit	28	29	29	29	33	28	29	30	31	31	31 rows *
* to *	3	3	3	3	3	4	4	4	4	4	4 times more.

Knit straight until RC reads	195	206	220	232	245	267	275	290	302	312	322.
------------------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Place WY marker at side edges to mark centre back.

Knit straight until RC reads	390	412	440	464	490	534	550	580	604	624	644.
------------------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Cast off. Finish off buttonholes by hand.

DB machines only: Arrange needles for 1 x 1 rib pitch setting. Using MY, cast on. RC 000. T2/2, knit 6 rows.

** Trans the sts for a buttonhole over the centre 2 sts.

Knit	30	32	32	32	36	31	32	34	35	35	35 rows **.
Rep from ** to **	3	3	3	3	3	4	4	4	4	4	4 times more.

Knit straight until RC reads	212	226	241	254	268	295	303	320	333	343	354.
------------------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Place WY marker at both edges to mark centre back.

Knit straight until RC reads	424	452	482	508	536	590	606	640	666	686	708.
------------------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Cast off as given for Button Band of Round Neck Cardigan.

TO MAKE UP



Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Shoulder seams

Bring into B position	103	111	119	127	135	143	151	159	169	177	183 needles.
-----------------------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--------------

Join shoulder seams and cast off back neck sts at the same time.

Place centre of cast off edge of sleeve to shoulder seam and sew sleeve in place between markers using back st. Join side and sleeve seams using mattress st. With buttonholes on right for Lady's Cardigan or on left for Man's Cardigan, sew band in place, matching last buttonhole to start of front slope shaping and centre of band to centre of back neck. Sew on buttons.

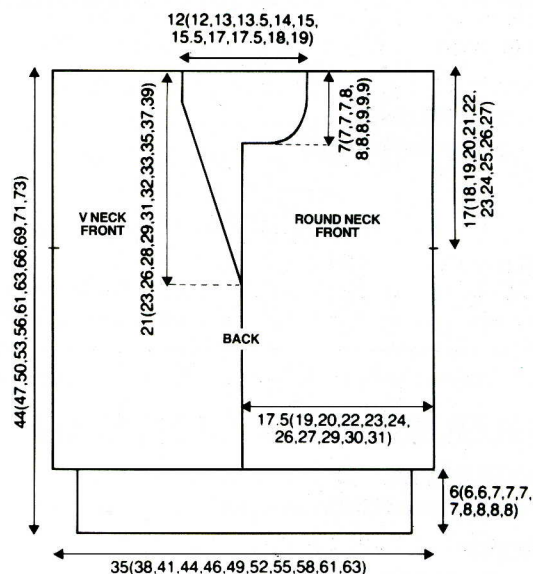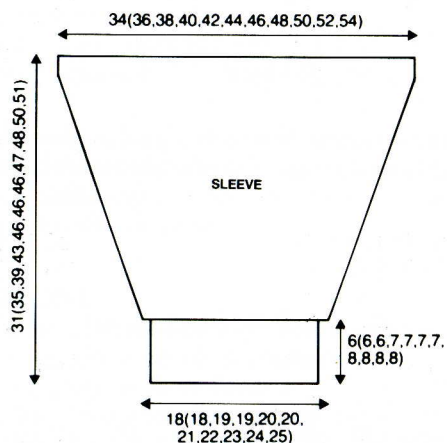

BORDER PATTERN 1





Work as given for One Colour Cardigans **but** work all ribs in Col A.
Using Card 1A for Group A machines, Chart 1B for Group B machines or mylar sheet and programme 1C for Group C machines, work the first 13 rows in border patt as follows:
RC 000. T6 $\frac{2}{3}$, using Col A, knit 1 row. COL. Set machine for pattern and knit 1 row to arrange needles.

Group A and C machines only: T7 $\frac{2}{3}$, set carr for Fair Isle and with Col B in FA, Col A in FB, knit 2 rows. Set carr for plain knitting (but allowing card to rotate throughout) using Col B, knit 2 rows. Re-set carr for Fair Isle, Col B in FA, Col A in FB, knit 7 rows.


Group B machines only: T7 $\frac{2}{3}$ work the 11 rows as given on Chart 1B.

All machines: RC reads 13. Break off Col A, set for plain knitting, T6 $\frac{2}{3}$, complete the piece in Col B only. All bands are worked in Col A.


CHART 1B

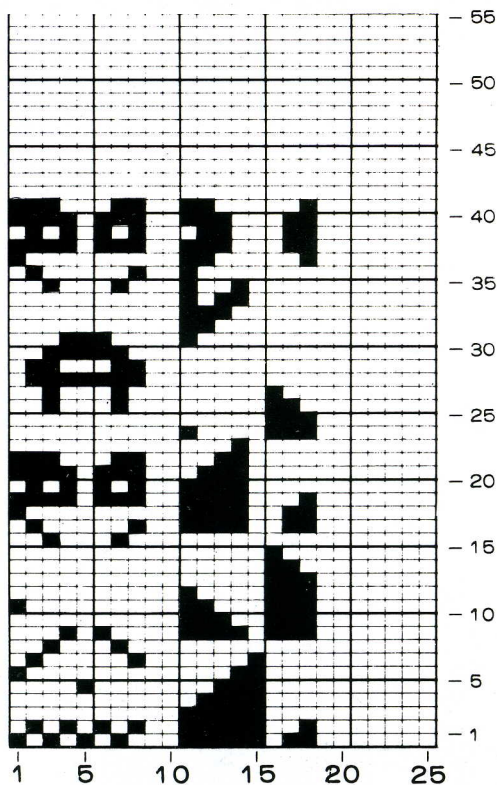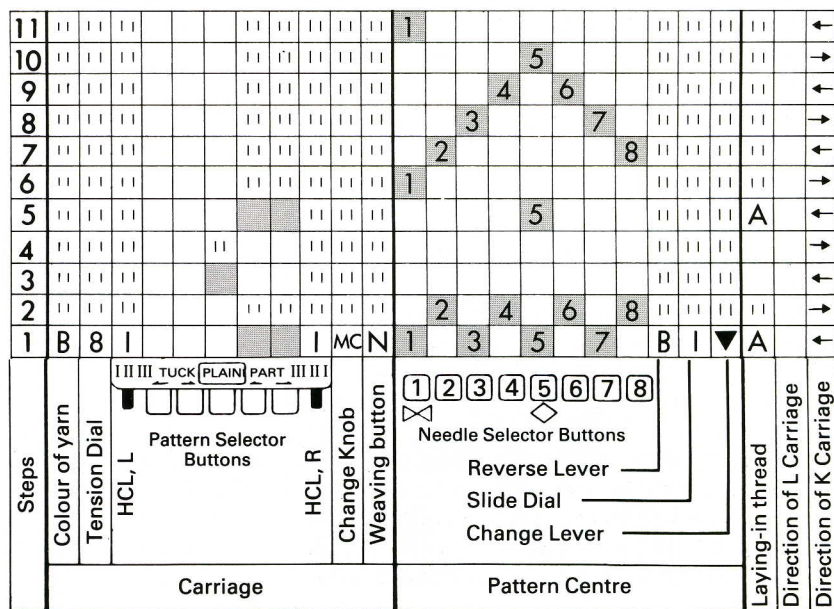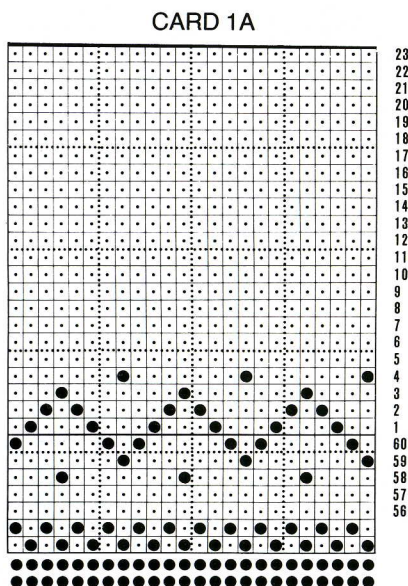


BORDER PATTERN 4C




BORDER PATTERN 3C



BORDER PATTERN 1C



BORDER PATTERN 2C



BORDER PATTERN 2

Work as given for One Colour Cardigans **but** work all ribs in Col A. Using Card 2A for Group A machines, Chart 2B for Group B machines or mylar sheet and programme 2C for Group C machines work the first 29 rows in border patt as follows: RC 000. T6 $\frac{2}{3}$, using Col A knit 1 row. COL. Set machine for pattern and knit 1 row to arrange needles.

Group A and C machines only: T7 $\frac{2}{3}$, set carr for Fair Isle.

Col B in FA, Col A in FB, knit 7 rows.

Set carr for plain knitting (but allowing card to rotate throughout), using Col B, knit 1 row.

Re-set carr for Fair Isle.

Col B in FA, Col C in FB, knit 7 rows.

Set carr for plain knitting, using Col B, knit 1 row.

Re-set carr for Fair Isle.

Col B in FA, Col A in FB, knit 7 rows.

Col B in FA, Col C in FB, knit 4 rows.

Group B machines only: T7 $\frac{2}{3}$, work the 27 rows as given on Chart 2B.

All machines: RC reads 29. Break off A and C, set for plain knitting, T6 $\frac{2}{3}$, complete piece using Col B. All bands are worked in Col A.

CARD 2A


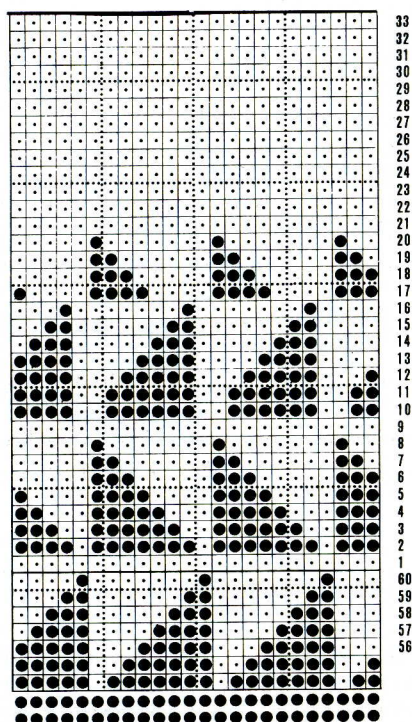


CHART 2B

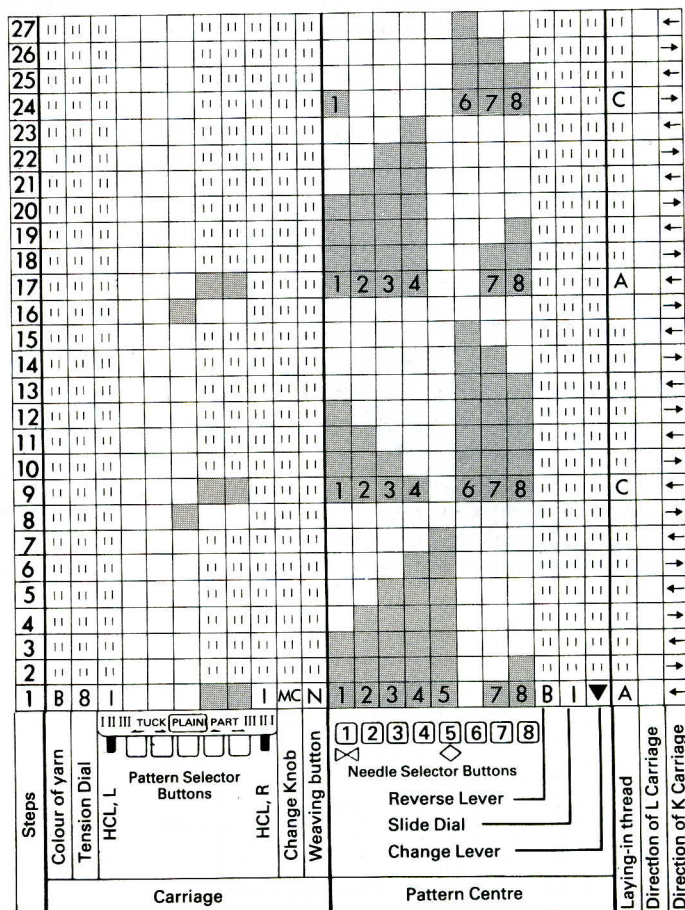

BORDER PATTERN 3

Work as given for One Colour Cardigans **but** work all ribs in Col A. Using Card 3A for Group A machines, Chart 3B for Group B machines or mylar sheet and programme 3C for Group C machines work the first 15 rows in border patt as follows: RC 000. T6 $\frac{2}{3}$, using Col B knit 2 rows.

Using Col A, knit 1 row. COL. Set machine for pattern and knit 1 row to arrange needles.

Group A and C machines only: T7 $\frac{2}{3}$. Set carr for Fair Isle.

Col B in FA, Col A in FB, knit 6 rows.

Col B in FA, Col C in FB, knit 5 rows.

Group B machines only: T7 $\frac{2}{3}$, work the 11 rows as given on Chart 3B.

All machines: RC reads 15. Set for plain knitting, T6 $\frac{2}{3}$, complete the piece in Col B. All bands are worked in Col A.

CARD 3A

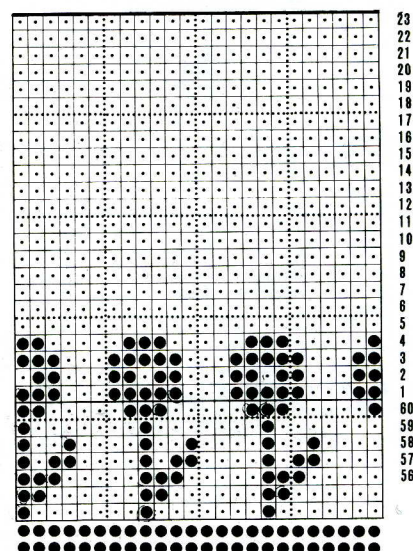


CHART 3B

[illegible]

BORDER PATTERN 4

Work as given for One Colour Cardigans **but** work all ribs in Col A. Using Card 4A for Group A machines, Chart 4B for Group B machines or mylar sheet and programme 4C for Group C machines work the first 28 rows in border patt as follows: RC 000. T6%, using Col B, knit 1 row. COL. Set machine for pattern and knit 1 row to arrange needles.

Group A and C machines only: Set carr for Fair Isle, T7 $\frac{2}{3}$.

Col B in FA, Col C in FB, knit 3 rows.

Col B in FA, Col A in FB, knit 1 row.

Col B in FA, Col D in FB, knit 1 row.

Col B in FA, Col C in FB, knit 1 row.

Col B in FA, Col A in FB, knit 1 row.

Set carr for plain knitting (but still allowing card to rotate throughout) using Col B, knit 3 rows.

Re-set carr for Fair Isle.

Col B in FA, Col C in FB, knit 2 rows.

Col B in FA, Col A in FB, knit 1 row.

Col B in FA, Col D in FB, knit 2 rows.

Col B in FA, Col A in FB, knit 1 row.

CARD 4A

Set carr for plain knitting and using Col B, knit 3 rows.

Re-set carr for Fair Isle.

Col B in FA, Col C in FB, knit 2 rows.

Col B in FA, Col D in FB, knit 1 row.

Col B in FA, Col A in FB, knit 2 rows.

Col B in FA, Col C in FB, knit 2 rows.

Group B machines only: T7 $\frac{2}{3}$ Work the 26 rows as given on Chart 4B.


All machines: RC reads 28. Break off Col A, Col C and Col D. Set for plain knitting, T6¾, complete the piece in Col B. All bands are worked in Col A.

CHART 4B

[illegible]

4 DRESS

Illustrated in ARGYLL Ziggy shades 718 and 667.

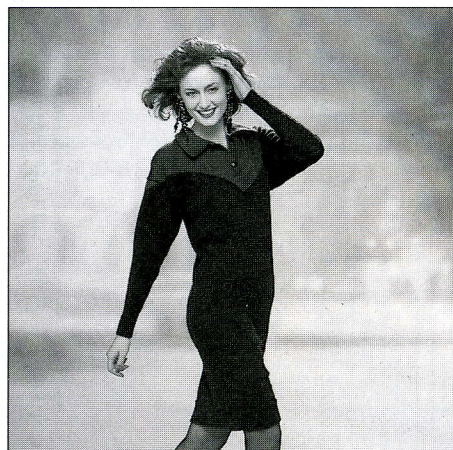

Techniques required to knit this pattern include:

ribs (for DB machines only)
 mock rib (for SB machines only)
 increasing
 decreasing
 increasing ff
 decreasing ff
 waste knitting
 holding sts using HP
 holding sts using nylon cord
 buttonholes in horizontal st st bands
 picking up sts
 joining shoulder seams and casting off back neck
 finishing

MACHINES

Groups A, B and C.

MATERIALS

ARGYLL Ziggy 340g cones
 Buttons

1 cone each in Col A and Col B for all sizes.
 2 for all sizes.

MEASUREMENTS

To fit bust	30	32	34	36	38	40	42 inch
	76	81	86	91	97	102	107 cm
Actual measurement	96	100	106	110	116	122	128 cm
Length from shoulder	99	100	101	102	103	104	105 cm
Sleeve length	44	45	46	47	48	49	49 cm

TENSION

St st — 40 sts = 13.1 cm and 60 rows = 14.3 cm, (approx 30 sts and 42 rows = 10 cm square) approx T6.

RIBS

DB machines: 1 x 1 pitch setting, T2/2, or SB machines: 2 x 1 mock rib, T4.

BACK

Bring into B position

113 119 128 134 143 152 161 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T4, using Col A, knit 36 rows. T7, knit 1 row. T4, knit 36 rows. Make a hem. T6, knit 1 row. COR.

DB machines only: Arrange needles for 1 x 1 rib pitch setting. Cast on with Col A. RC 000. T2/2, knit 36 rows. COR. Trans sts to MB.

All machines: For 1st and 2nd sizes only inc 1 st at both ends of work. For 3rd, 4th and 6th sizes only inc 1 st at

right-hand side of work. Do not knit row

115 121 129 135 143 153 161 sts.

RC 000. T6, knit 4 rows. Inc 1 st at each end of next and

every foll 18th row until there are

145 151 159 165 173 183 191 sts.

Knit straight to RC 262.

Commence yoke

Counting from the left, place
into A position using nylon cord.

72 75 79 82 86 91 95 needles

Set HCL levers to H (II for 710 users).

Bring centre needle (needle No. 1 to the right of centre 0) into HP.

★ RC 000. Always taking the yarn under the last needle in HP knit

2 rows. *On the opposite side of the carr bring 2 more needles into

HP. Knit 2 rows.*

Rep from * to * until

2 3 3 2 2 3 3 needles

rem in B position.

RC reads

72 74 78 82 86 90 94.

Bring rem needles into HP. Break yarn. ★

Take carr to left-hand side of machine. Bring needles held
on nylon cord back into B position.

Counting from the right, place

72 75 79 82 86 91 95 needles

into A position using nylon cord. Rejoin Col A and work as

given for first side from ★ to ★.

COR. Bring sts held on nylon cord back into B position then bring
all needles into HP.

Using Col B, knit centre st by hand and leave in B position, then take yarn under first needle in HP at right and over rem needles before threading through carr.

RC 000. Return 2 needles at left of centre to D position and knit 1 row. Return 2 needles at right of centre to D position and knit 1 row.★★

Cont returning 2 needles to D position at opposite end to carr on every row until all needles have been knitted to B position. Knit straight until RC reads 116 120 124 128 132 138 142.
Waste knit.

FRONT

Work as given for Back to ★★.

Cont returning 2 needles to D position at opposite end to carr until 53 needles are in B position, ending COR. RC reads 26.

Divide for opening

Using a spare length of Col B cast off centre 7 sts.

Counting from the left, place 69 72 76 79 83 88 92 needles
into A position using nylon cord.

Keeping centre edge straight cont to return 2 needles to

D position on every **alt** row until 2 3 3 2 2 3 3 sts
rem in HP. Knit 1 row. Return rem needles from HP to D position and knit straight until RC reads 85 85 89 93 93 99 103.

★★★Shape neck

At beg of next row cast off 5 5 6 7 7 7 8 sts.

Dec 1 st at neck edge on next 5 6 6 6 7 8 8 rows,

then on every foll alt row until 54 56 58 60 63 67 70 sts rem.

Knit straight to RC 116 120 124 128 132 138 142.

Waste knit.

COR. Return needles held on nylon cord to B position.

Counting from the left, bring into HP 44 47 51 54 58 63 67 needles.

(25 needles in B position). Re-set RC to 26. Rejoin Col B and

always taking yarn under last needle in HP at carr end, knit 2 rows.

Bring 2 needles to D position on next and every alt row until ..

rem in HP. 2 3 3 2 2 3 3 needles

Bring these needles to D position on next row, then knit straight

until RC reads 86 86 90 94 94 100 104.

Complete as given for first side from ★★★ to end.

SLEEVES

Bring into B position 59 62 65 65 68 71 71 needles.

SB machines only: Arrange needles for 2 x 1 mock rib. RC 000. T4, using Col A knit 28 rows. T8, knit 1 row. T4, knit 28 rows. Make a hem. T6, knit 1 row.

All machines: For **2nd and 5th sizes only** inc 1 st at right-hand side of work. For **6th and 7th sizes only** inc 1st at both ends of work. Do not knit the row 59 63 65 65 69 73 73 sts.

RC 000. T6, knit 2 rows, then inc 1 st at each end of next and every

foll 4th row until there are 119 125 129 131 137 143 143 sts.

Knit to RC 122 126 130 134 138 142 142.

Work in patt as follows:

Counting from the left, place 59 62 64 65 68 71 71 needles

into A position using nylon cord. Set HCL levers to H (II for 710

users). Bring centre needle into HP and always taking yarn under

the last needle in HP. Work as follows:

★★★RC 000. Keeping incs correct, knit 2 rows. Bring 2 needles

at opposite end to carr into HP on next and every alt row until

there are 33 needles in HP ending COR. RC reads 34.

Cast off rem 36 39 41 42 45 48 48 sts.

Take carr to left-hand side and return needles held on nylon cord

to B position leaving 33 needles in HP. Rejoin Col A and work as

given for first side from ★★★ to end. 65 needles in centre rem in

HP.

COR. Using Col B knit centre st only by hand, then take yarn under

first needle in HP at right and over rem needles before threading

through carr. Set HCL levers to H (II for 710 users).

RC 000. Always taking yarn under last needle in HP, bring 2

needles at opposite end of carr into D position on every row until

all needles are in B position. RC 32. Cast off.

BUTTONHOLE BAND

Bring into B position 42 42 44 48 48 50 50 needles.

116 120 124 128 132 138 142.

69 72 76 79 83 88 92 needles

2 3 3 2 2 3 3 sts

85 85 89 93 93 99 103.

5 5 6 7 7 7 8 sts.

5 6 6 6 7 8 8 rows,

54 56 58 60 63 67 70 sts rem.

116 120 124 128 132 138 142.

44 47 51 54 58 63 67 needles.

2 3 3 2 2 3 3 needles

86 86 90 94 94 100 104.

59 62 65 65 68 71 71 needles.

DB machines only: Arrange needles for 1 x 1 rib pitch setting. Cast on with Col A. RC 000. T2/2, knit 28 rows. COR. Trans sts to MB.

59 63 65 65 69 73 73 sts.

119 125 129 131 137 143 143 sts.

122 126 130 134 138 142 142.

59 62 64 65 68 71 71 needles

36 39 41 42 45 48 48 sts.

42 42 44 48 48 50 50 needles.

With wrong (purl) side of work facing, pick up and place onto needles in B position along right side of front opening. RC 000. T5, using Col B, knit 7 rows. Counting from the right, mark buttonholes over 5th, 6th and 7th needles and counting from the left over 10th, 11th and 12th needles. Knit 7 rows. T7, knit 1 row. T5, knit 7 rows. Complete buttonholes. Knit 7 rows. RC reads 29. Cast off.

BUTTON BAND

Work as given for Buttonhole Band **but** picking up sts along left side of front opening and omitting buttonholes.

COLLAR

Bring into B position Cast on with WY.

RC 000. COR. T5, using Col B inc 1 st ff at each end of every following 4th row, AT THE SAME TIME loosening tension by one whole number every 12 rows until RC reads 35 T8, knit 1 row.

T7, dec 1 st ff at each end of every following 4th row AT THE SAME TIME tightening the tension by one whole number every 12 rows until RC reads 71 Make hem. T7, knit 1 row. Cast off.

TO MAKE UP

Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Shoulder seams

Bring into B position Join shoulder seams and cast off back neck sts at the same time.

Measure down from each shoulder on Back and Front and mark these points at side edges with coloured threads. Using back st sew sleeve in place between markers matching sleeve pattern to yoke.

Join side and sleeve seams using mattress st. Fold bands in half to wrong (purl) side and slip st in place. Sew bands in place to cast off sts at centre front. Close ends of bands and collar. Sew collar to neck edge, starting and finishing at centre of front neck bands. Sew on buttons.

42 42 44 48 48 50 50 sts



112 122 132 140 149 157 166 needles.

128 138 148 156 165 173 182 sts.

112 122 132 140 149 157 166 sts.

145 151 159 165 173 183 191 needles.

23 24 25 25 26 27 27 cm

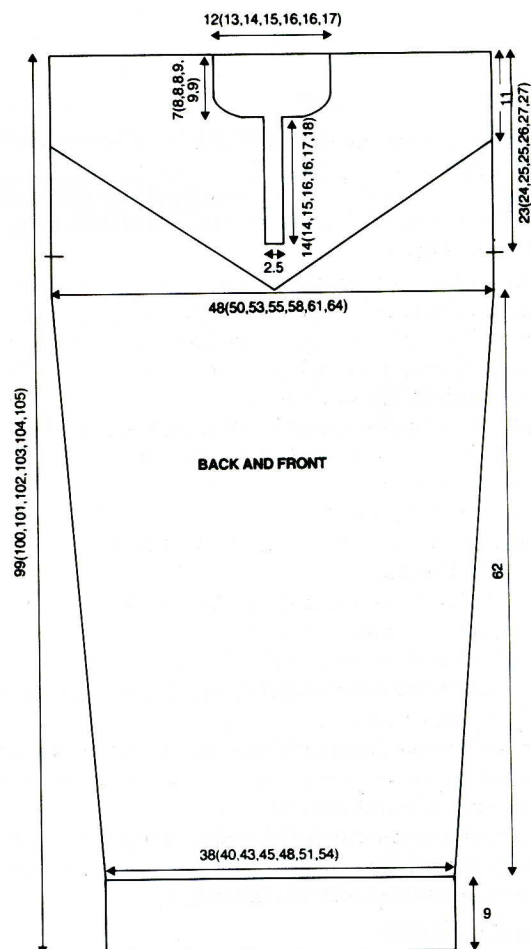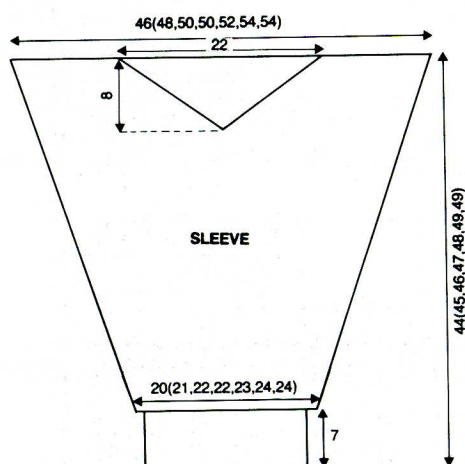

Shape shoulder

* Counting from armhole edge and using nylon cord, place into

A position 6 6 6 7 8 8 8 9 9 needles

Knit 1 row.

Place 1 needle into A position at same edge. Knit 1 row. *

Rep from * to * once more. Carr at neck edge. Bring the 14 14 14 16 18 18 18 20 20 sts
from nylon cord to B position. Set for plain knitting and waste knit.

With COL return the sts held on nylon cord to B position. See instruction manual for setting patt for 2nd side of neck. COR.

RC 000. Work as given for first side to start of shoulder shaping.

Knit 1 more row. RC reads 82 90 98 102 106 114 122 126 130.

Complete as given for first side.

BACK NECKBAND

Work as given for Back Neckband of Sweater.

RIGHT FRONT NECKBAND

Bring into B position 77 80 83 89 92 98 101 107 110 needles.

Complete as given for Right Front Neckband of Sweater.

LEFT FRONT NECKBAND

Work as given for Right Front Neckband **but** for SB machines only, work shaped edge at right-hand side instead of left.

ARMBANDS

Shoulder seams

Bring into B position 21 22 22 24 26 27 27 29 30 needles.

Replace sts for left shoulder from Back and Front onto needles in B position, knit 1 row and cast off together. Repeat for right shoulder. Join neckband seams using mattress st.

Bring into B position 155 161 167 173 176 182 188 194 200 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T5, using Col A, knit 11 rows. T8, knit 1 row. T5, knit 11 rows. Make a hem. T7, knit 1 row. COR.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.





Cast on with Col A. RC 000. T3/3, in rib knit 11 rows. Trans sts to MB. T7, knit 1 row.

All machines: With wrong (purl) side of work facing, pick up 155 161 167 173 176 182 188 194 200 sts
evenly round armhole edge and place onto needles in B position.
T7, knit 1 row and cast off.

TO MAKE UP


Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Join neckbands at centre front as given for Sweater. Join side and armband seams using mattress st.

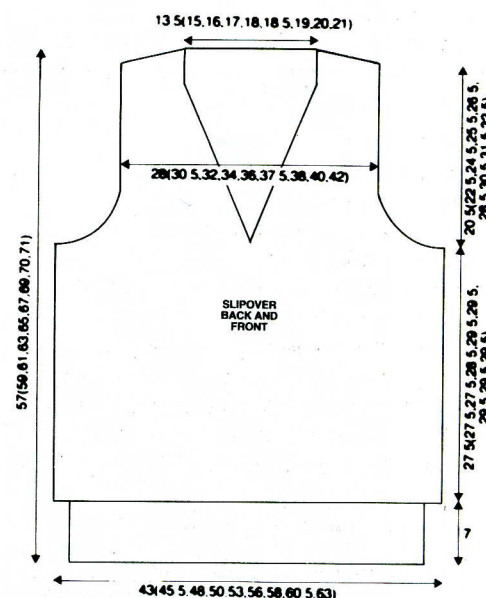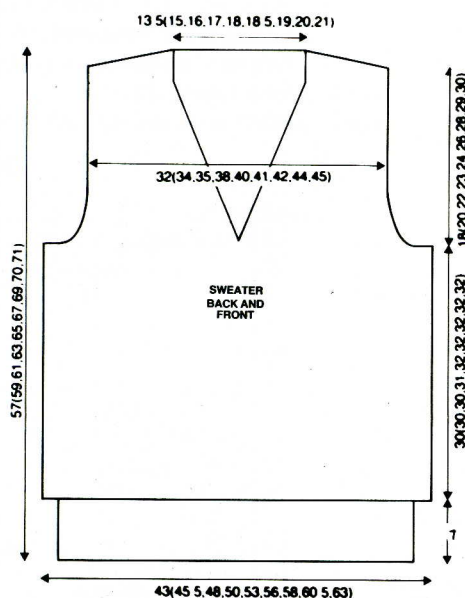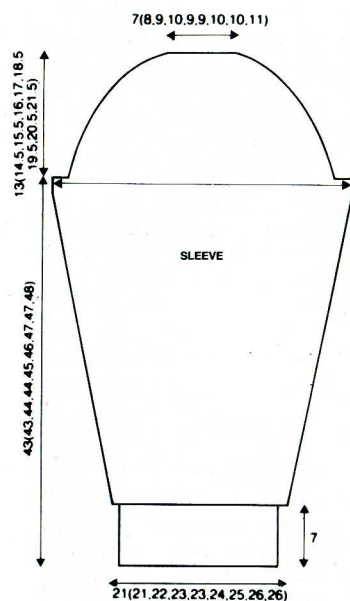

5 BOUCLE SUIT

Illustrated in BRAMWELL Astrakan shades 36 and 52.

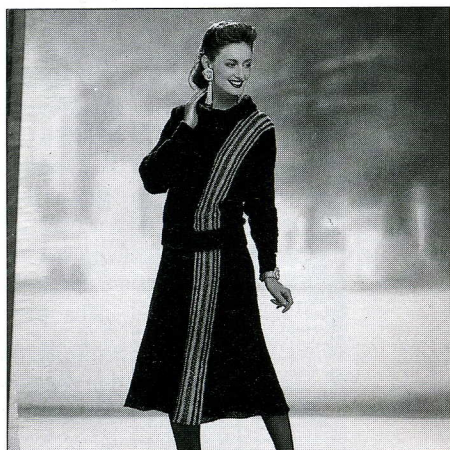

Techniques required to knit this pattern include:

increasing
decreasing
waste knitting
picking up sts
holding sts using HP
setting for pattern
marking side edges
finishing

MACHINES

Groups A, B and C.

MATERIALS

BRAMWELL Astrakan 500g cones.

Sweater	1 cone each Col A and Col B for all sizes.
Skirt	1 cone each Col A and Col B for all sizes.
Suit	2 cones Col A and 1 cone Col B for all sizes.
Waist length of 2 cm wide elastic for skirt.	

MEASUREMENTS

To fit bust	30	32	34	36	38	40	42	44 inch
	76	81	86	91	97	102	107	112 cm
Sweater								
Length from shoulder	56	58	59	60	61	62	63	64 cm
Wrist to wrist	122	128	136	141	144	146	153	156 cm
Skirt								
To fit hip	81	86	91	97	102	107	112	117 cm
Length	75	75	75	75	75	75	75	75 cm

TENSION

St st — 40 sts = 15.2 cm and 60 rows = 9.8 cm, (approx 26 sts and 61 rows = 10 cm square) approx T3.

PATTERN NOTES

Work the 64 patt rows as follows:

All machines: Using Col B, knit 4 rows. Using Col A, knit 2 rows.

Group A and C machines only: Set machine for lace pattern.

Allowing card to rotate throughout, and operating Lace Carriage as shown on card, work as follows:

* Using Col A, knit 2 rows, using Col B, knit 2 rows, use Lace Carr.

Using Col B, knit 2 rows, using Col A, knit 2 rows, use Lace Carr.

Using Col A, knit 2 rows. *

Using Col B, knit 7 rows. COL.

Set Change Knob to KC or KC1. Knit 1 row Col B.

Press both Tuck Buttons.

Using Col A, knit 4 rows, using Col B, knit 2 rows.

Rep last 6 rows twice more.

Set Change Knob to N.

Using Col B, knit 6 rows, using Col A, knit 2 rows, use Lace Carr.

Rep from * to * once more.

Group B machines only: Set machine and work the 34 rows as shown on chart.

Set machine for plain knitting.


Using Col B, knit 8 rows, using Col A, knit 2 rows.

Rep rows 1 to 10 from Chart B.


All machines: Set machine for plain knitting.

Using Col B, knit 4 rows.

These 64 rows form patt.

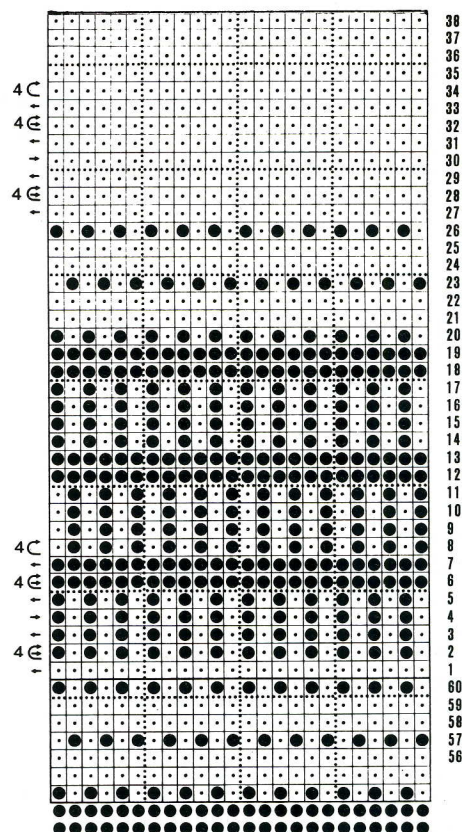

Using B work 8 rows in st st



Knit straight until RC reads	346	366	390	404	416	424	446	458,
ending COR.								
Inc 1 st at neck edge on next and every foll alt row until there are .	117	123	125	129	131	133	137	139 sts,
ending COL. RC reads	369	391	415	431	445	453	475	487.
Cast on 7 sts at beg of row.	124	130	132	136	138	140	144	146 sts.
Knit straight until RC reads	462	490	524	544	566	576	608	626.
★ ★ Shape 2nd sleeve								
Cast off 10 sts at beg of next row then cast off 4 sts at beg of								
every foll alt row 4 times in all. Knit 1 row. RC reads	472	500	534	554	576	586	618	636.
Cast off 2 sts at beg of next and every alt row until	84	86	94	96	96	96	100	104 sts rem,
ending COR. Dec 1 st at same edge on next and every foll alt row								
until	58	60	62	64	64	66	68	68 sts rem.
Dec 1 st on every foll 4th row until	41	46	46	53	51	55	61	58 sts rem.
Dec 1 st on every foll 6th row until	34	36	36	39	39	41	43	43 sts rem.
Knit 4 rows straight. RC reads	651	689	737	763	785	795	839	857.
Waste knit.								

BACK (knitted sideways starting at left cuff)

Working at the right-hand side of machine, work as given for Front to ★ **but** reversing shaping by reading Left for Right and Right for Left.

Knit straight until RC reads	219	235	259	269	277	279	301	307.
Work 64 rows in patt.								

Break off Col B and cont in plain knitting in Col A only. Knit 2 rows ending COR. RC reads	285	301	325	335	343	345	367	373.
--	-----	-----	-----	-----	-----	-----	-----	------

Shape back neck

Cast off 3 sts at beg of next row. Dec 1 st at neck edge on next and every foll alt row 4 times in all.	117	123	125	129	131	133	137	139 sts rem.
Work straight until RC reads	362	384	408	424	438	446	468	480.
Inc 1 st at neck edge on next and every foll alt row 4 times in all.								
Cast on 3 sts at beg of next row.	124	130	132	136	138	140	144	146 sts.
Knit straight until RC reads.	462	490	524	544	566	576	608	626,
ending COL.								

Work as given for Front from ★ ★ to end **but** reading Right for Left and Left for Right.

WELTS

Bring into B position	90	95	103	108	116	124	131	137 needles.
With wrong (purl) side of work facing, pick up	90	95	103	108	116	124	131	137 sts
evenly along lower edge of Back or Front and place on needles in B position.								
RC 000. T3, using Col A, knit 10 rows. Inc 1 st at both ends of next and every foll 10th row 4 times in all.	98	103	111	116	124	132	139	145 sts.
Work straight until RC reads 48.								
T7, knit 1 row. T3, knit 8 rows.								
Dec 1 st at both ends of next and every foll 10th row until	90	95	103	108	116	124	131	137 sts rem.
Knit straight until RC reads 97. Cast off loosely.								

CUFFS

Join top arm and shoulder seams using back st.								
Bring into B position	47	49	50	52	54	55	57	59 needles.
With wrong (purl) side of work facing, pick up and place on needles in B position	47	49	50	52	54	55	57	59 sts
evenly along ends of sleeves.								
RC 000. T3, using Col A, knit 48 rows.								
T7, knit 1 row. T3, knit 48 rows. Cast off loosely.								

COLLAR

Bring into B position 83 needles.								
Using WY, cast on and knit a few rows, ending COR.								
RC 000. T3, using Col A, knit	360	370	380	380	394	404	404	414 rows.
Waste knit.								
Join collar into a circle as follows:								
With right (knit) side of collar facing, replace the last 83 sts onto needles in B position. Remove waste knitting. With wrong (purl) side facing, place the sinker loops from waste knitting at beg of collar onto same needles.								
T5, using Col A, knit 1 row. Cast off loosely.								

TO MAKE UP

Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Join side and cuff seams using back st. Fold welts and cuffs in half

to wrong side and slip st in place.

With right (knit) sides together, sew one edge of collar around neckline, easing to fit. Fold collar in half to wrong side and slip st rem edge around neckline. Fold in half to outside.

SKIRT (worked sideways in one piece)

Note: When working with needles in HP, make sure the carr goes across the bed far enough to operate the RC.

Bring into B position 200 needles.

Using WY, cast on and knit a few rows, ending COR.

RC 000, T3, using Col A, knit 2 rows.

Work 64 rows in patt. RC reads 66.

Set carr to plain. Break off Col B and cont in Col A only.

★ ★ ★ Set HCL Lever to H (II for 710 users).

RC 000. Knit 1 row. COL.

Counting from right bring 11 needles from B position into HP.

Knit 1 row.

Bring next needle at right into HP and knit 1 row.

Rep last 2 rows 14 more times. RC reads 31.

Return HCL Lever to N (I for 710 users).

Knit until RC reads 60. Place a WY marker at both edges to mark end of section ★ ★ ★.

Rep from ★ ★ ★ to ★ ★ ★ 13 14 15 16 17 18 19 20 times more.

Waste knit.

TO MAKE UP

Pin out one section to size following measurements on diagram.




Steam press using a damp cloth and a moderately hot iron. Leave to dry before pinning out next section. This is to set the sts so that the skirt will not drop. Join skirt as follows:

Bring 200 needles into B position. With right (knit) side of work facing, replace the sinker loops from WY at beg of skirt onto needles in B position.

With wrong (purl) side of work facing, replace 200 sts from waste knitting at end of skirt onto same needles.

T5, using Col A, knit 1 row. Cast off loosely.

Remove waste knitting. Make a casing at top of skirt by folding 2cm to wrong side and slip stitching in place. Thread elastic through casing and join ends.

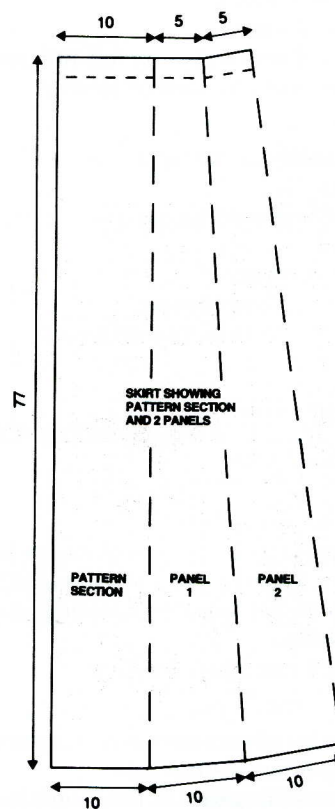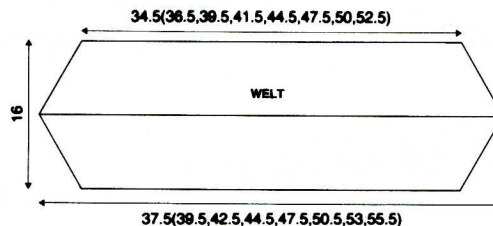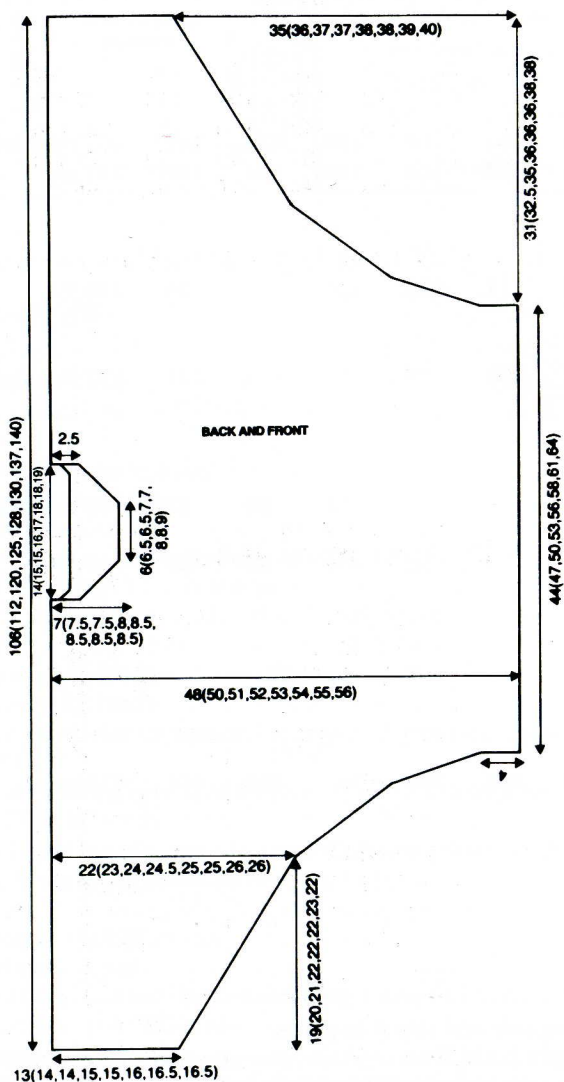

6 FAIR ISLE SWEATER AND SLIPOVER

Illustrated in ARGYLL Lazer shades 560 and 561, Laser Print shades 704 and 708.



Techniques required to knit this pattern include:

- ribs** (for DB machines only)
- mock rib** (for SB machines only)
- setting for pattern**
- increasing**
- decreasing**
- waste knitting**
- holding sts using nylon cord**
- picking up sts**
- joining shoulder seams**
- finishing**

This pattern gives instructions to knit a Sweater or Slipover in an all over Fair Isle pattern. Both the garments are illustrated in Fair Isle pattern 1 using different colour combinations. Details for Fair Isle patterns 2, 3 and 4 are given at the end of the pattern.

MACHINES

Groups A, B and C.

MATERIALS

ARGYLL Lazer 340g cones and ARGYLL Lazer Print 350g cones.

Sweater 1 cone each in Col A and Col B for all sizes.

Slipover	1 cone each in Col A and Col B for all sizes.
---------------------------	---

MEASUREMENTS



To fit chest/bust	30	32	34	36	38	40	42	44	46 inch
	76	81	86	91	97	102	107	112	117 cm
Actual measurement	86	91	96	100	106	112	116	121	126 cm
Length from back neck	57	59	61	63	65	67	69	70	71 cm
Sleeve length	43	43	44	44	45	46	47	47	48 cm

TENSION

Patt — 40 sts = 14 cm and 60 rows = 15 cm, (approx 28.5 sts and 40 rows = 10 cm square) approx T8.

RIBS

DB machines: 1 x 1 pitch setting, T3/3, or SB machines: 2 x 1 mock rib, T5.

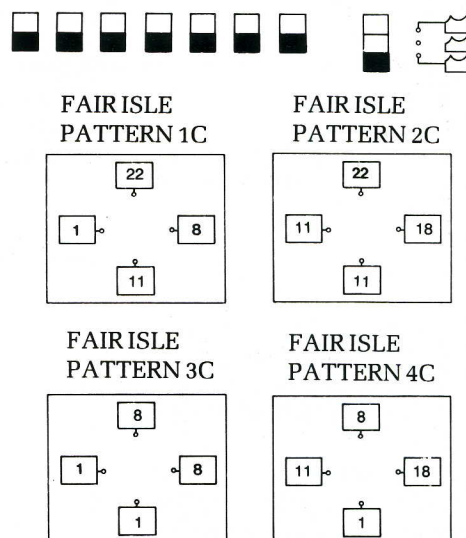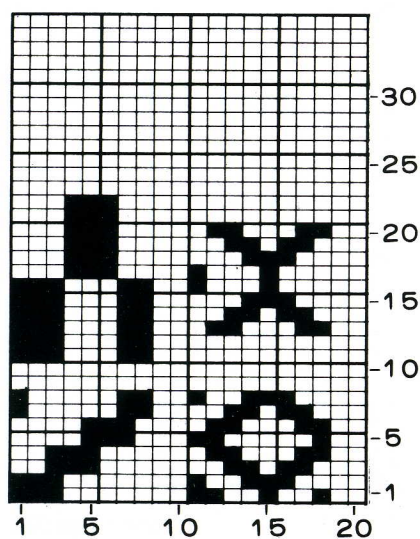

[illegible]

BACK

SB machines only: Arrange needles for 2 x 1 mock rib.
RC 000. T5, using Col A, knit 27 rows. T8, knit 1 row. T5, knit 27
rows. Make a hem but do not knit row. COL.

All machines: For 1st, 2nd, 6th and 7th sizes only inc 1 st at right-hand side of work. For 5th size only inc 1 st at both ends of work. Do not knit row.

Set for patt. T7, knit 1 row to arrange needles for patt.

RC 000. T8, in Fair Isle patt, knit until RC reads

Shape armholes

RC 000. At beg of next 2 rows cast off

Dec 1 st at both ends of next

then at both ends of every foll alt row until

Knit straight until RC reads

Shape shoulders

At opposite end to carr and using nylon cord, place into

A position

Knit 1 row.

* At carr end place 1 needle into A position and at opposite end to carr place

into A position. Knit 1 row. *

Rep from * to * twice more.

** At carr end place place 1 needle into A position and at opposite end to carr place

into A position. Knit 1 row. **

Rep from ** to ** once more.

At carr end place 1 needle into A position. Knit 1 row. Break off

Col A and Col B. Set for plain knitting and waste knit the rem. in B position.

With COR and counting from the right bring the
for left shoulder from nylon cord to B position and waste knit.

Waste knit rem sts for right shoulder.

FRONT

Work as given for Back to ★.

122 128 137 143 149 158 164 173 179 needles.

DB machines only: Arrange needles for 1 x 1 rib pitch setting. Cast on with Col A. RC 000. T3/3, in rib knit 27 rows. COL. Trans sts to MB.

123 129 137 143 151 159 165 173 179 sts.

120 120 120 124 128 128 128 128 128.

5	5	6	6	6	7	8	8	8 sts.★
7	5	5	5	5	5	5	5	5 rows,
91	97	101	107	113	117	119	125	129 sts rem.
72	80	88	92	96	104	112	116	120.

8 8 8 9 9 10 10 10 11 needles.

8 8 8 9 9 10 10 10 11 needles

7 8 8 8 10 9 9 11 10 needles

39 43 47 49 51 53 55 57 59 sts

26 27 27 29 31 32 32 34 35 sts

Divide for neck

Take the centre st off onto a length of WY and place the empty needle in A position.

Counting from the left, and using nylon cord, place into

A position

Make a note of the patt row.

RC 000. Dec 1 st at neck edge on every foll 3rd row, AT THE SAME

TIME dec 1 st at armhole edge on next

then on every foll alt row until RC reads

56 59 62 65 69 72 74 78 81 needles.

7 5 5 5 5 5 5 5 5 rows,

15 17 19 19 21 23 25 27 29.

40 43 44 47 49 51 51 53 55 sts rem.

Keeping armhole edge straight cont dec at neck edge as before until

33 37 38 41 44 48 49 52 53 sts rem.

Dec 1 st at neck edge on every foll 4th row until

26 27 27 29 31 32 32 34 35 sts rem.

Knit straight until RC reads

71 79 87 91 95 103 111 115 119.

Shape shoulder

* Counting from armhole edge and using nylon cord, place into A position

8 8 8 9 9 10 10 10 11 needles.

Knit 1 row.

Place 1 more needle into A position at same edge. Knit 1 row.*

Rep from * to * once more. Carr at neck edge. Counting from

armhole edge bring the

18 18 18 20 20 22 22 22 24 sts

from nylon cord to B position. Break off Col A and Col B.

Set for plain knitting. Waste knit.

With COL return the sts held on nylon cord to B position. See instruction manual for setting patt for 2nd side of neck. COR.

RC 000. Work as given for first side to start of shoulder shaping.

Knit 1 more row. RC reads

72 80 88 92 96 104 112 116 120.

Complete as given for first side.

SLEEVES

Bring into B position

59 59 62 65 65 68 71 74 74 needles.

Work rib as given for Back. COL.

All machines: For 1st, 2nd, 4th, 5th and 7th sizes only inc 1 st at both ends of work. For 3rd, 6th, 8th and 9th sizes only inc 1 st at right-hand side of work. Do not knit row.

61 61 63 67 67 69 73 75 75 sts.

Set for patt. T7, knit 1 row to arrange needles for patt.

RC 000. T8, working in Fair Isle patt, shape sides by inc 1 st at each end of 3rd and every foll

9th 7th 7th 6th 6th 6th 6th 6th 5th row

until there are

91 97 103 109 115 119 123 125 129 sts.

Knit straight until RC reads

144 144 148 148 152 156 160 160 164.

Shape top

RC 000. At beg of next 2 rows cast off

5 5 6 6 6 7 8 8 8 sts.

Dec 1 st at both ends of next

7 5 5 5 5 5 5 5 5 rows,

then at both ends of every foll 3rd row until

59 65 61 71 81 75 69 67 67 sts rem.

RC reads

21 25 37 31 25 37 49 55 61.

Dec 1 st at both ends of every foll alt row until

35 39 43 45 47 47 49 49 51 sts rem,

ending with COL.

Dec 1 st at both ends of next

5 5 5 5 7 7 7 7 7 rows.

RC reads

50 56 60 62 66 72 76 80 84.

At beg of next 2 rows cast off 3 sts. Cast off rem

19 23 27 29 27 27 29 29 31 sts.

BACK NECKBAND

Bring into B position

38 41 47 47 50 53 53 56 59 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

RC 000. T5, using Col A, knit 11 rows. T8, knit 1 row. T5, knit 10 rows. Make a hem. T7, knit 1 row. COL.

DB machines only: Arrange needles for 1 x 1 rib pitch setting. Cast on with Col A. RC 000. T3/3, in rib knit 10 rows. Trans sts to MB. T7, knit 1 row. COL.

All machines: With wrong (purl) side of Back facing, replace the . . . from back neck onto needles in B position dec

39 43 47 49 51 53 55 57 59 sts

evenly across. While holding work close to machine bring needles into HP. T7, knit 1 row. Cast off.

1 2 0 2 1 0 2 1 0 sts

RIGHT FRONT NECKBAND

Bring into B position

68 71 74 80 83 89 92 98 101 needles.

SB machines only: Arrange needles for 2 x 1 mock rib.

DB machines only: Work in rib as given for Back Neckband.

RC 000. T5, using Col A, knit 1 row. Set HCL lever to H (II for 710 users). Working all shaping at left-hand edge only and always taking yarn under last needle in HP, work as follows: Bring 1 needle into HP, knit 1 row.

* Bring 1 needle into HP, knit 2 rows. Bring 1 needle into HP, knit 1 row. *

Rep from * to * twice more. RC reads 11. T8, knit 1 row.

T5. **Return 1 needle from HP to D position, knit 2 rows. Return 1 needle from HP to D position, knit 1 row.
Rep from ** to ** twice more. RC reads 21. Return last needle from HP to D position, knit 1 row. Re-set HCL lever to N (I for 710 users). Make a hem. T7, knit 1 row. COL.

All machines: With wrong (purl) side of work facing, and starting at right, pick up evenly along right front neck to point of V and place on needles in B position. While holding work close to machine bring needles into HP. T7, knit 1 row. Cast off.

LEFT FRONT NECKBAND

Work as given for Right Front Neckband **but** for SB machines only, work shaped edge at right-hand side instead of left.

TO MAKE UP

Pin out to size following measurements on diagram. Press according to manufacturers instructions.

Shoulder seams

Bring into B position Replace sts for left shoulder from Back and Front onto needles in B position, knit 1 row and cast off together. Repeat for right shoulder.

Join neckband seams at shoulders using mattress st. At centre front sew along shaped fold on mock rib neckband or make a mitred seam (see diagram) on ribbed neckband. Catch centre st held on WY over join to make a neat finish. Join side and sleeve seams using mattress st. Set in sleeves using back st.

SLIPOVER

BACK

Work as given for Back of Sweater until RC reads

Shape armholes

RC 000. At beg of next 2 rows cast off
Dec 1 st at both ends of next
then at both ends of every foll alt row until
Knit straight until RC reads

Shape shoulders

At opposite end to carr, using nylon cord, place in A position .
Knit 1 row.

* At carr end place 1 needle in A position and at opposite end to carr place in A position
Knit 1 row. *

Rep from * to * twice more.

** At carr end place 1 needle in A position and at opposite end to carr place in A position
Knit 1 row. **

Rep from ** to ** once more.

At carr end place 1 needle in A position. Knit 1 row. Break off Col A and Col B. Set for plain knitting and waste knit
in B position.

With COR and counting from the right bring the
for left shoulder from nylon cord to B position and waste knit.
Waste knit sts for right shoulder.

FRONT

Work as given for Back of Sweater until RC reads

Shape armholes

At beg of next 2 rows cast off

Divide for neck

Take the centre st off onto a length of WY and place the empty needle in A position.

Counting from the left, using nylon cord, place
into A position. Make a note of the patt row.

RC 000. Dec 1 st at neck edge on every foll 3rd row, AT THE SAME TIME dec 1 st at armhole edge on next
then on every foll alt row until RC reads

Keeping armhole edge straight cont dec at neck edge as before until

Dec 1 st at neck edge on every foll 4th row until

Knit straight until RC reads

68 71 74 80 83 89 92 98 101 sts

26 27 27 29 31 32 32 34 35 needles.

110 110 110 114 118 118 118 118 118.

8 8 9 9 9 10 11 11 11 sts.

11 9 9 9 9 9 9 9 9 rows,

81 87 91 97 103 107 109 115 119 sts rem.

82 90 98 102 106 114 122 126 130.

6 6 6 7 8 8 8 9 9 needles.

6 6 6 7 8 8 8 9 9 needles.

6 7 7 7 7 8 8 8 9 needles.

39 43 47 49 51 53 55 57 59 sts rem

21 22 22 24 26 27 27 29 30 sts

110 110 110 114 118 118 118 118 118.

8 8 9 9 9 10 11 11 11 sts.

53 56 69 62 66 69 71 75 78 needles.

11 9 9 9 9 9 9 9 9 rows,

15 17 19 19 21 23 25 27 29.

35 38 39 42 44 46 46 48 50 sts rem.

28 32 33 36 39 43 44 47 48 sts rem.


21 22 22 24 26 27 27 29 30 sts rem.

81 89 97 101 105 113 121 125 129.


ALTERNATIVE PATTERN VARIATIONS

Providing exactly the same tension is achieved you may use any of the foll Fair Isle Patts.

CARD 2A

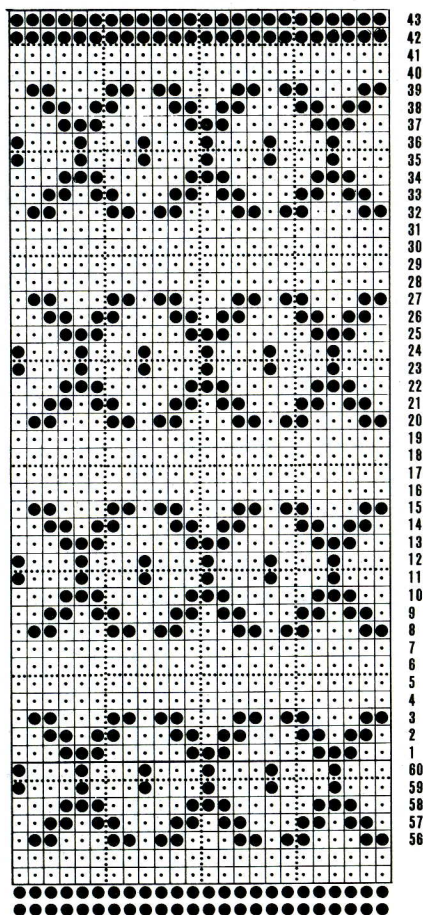

CARD 3A

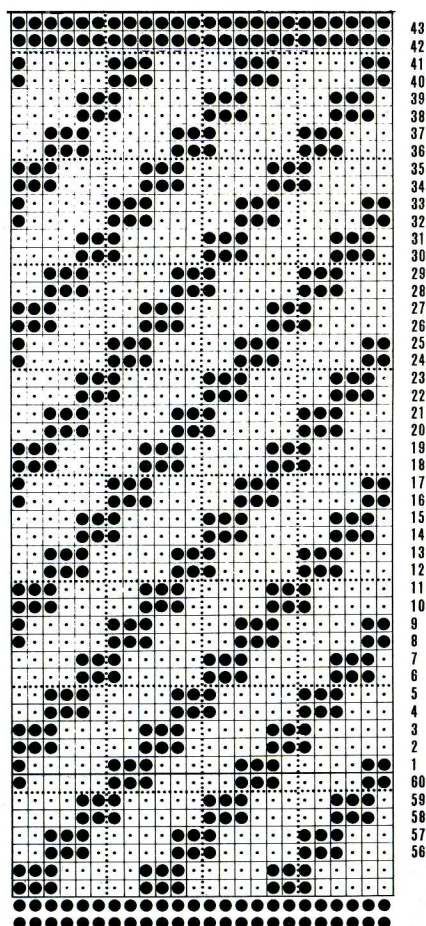

FAIR ISLE PATT 2

Work as given for Sweater or Slipover but working patt as follows:

Group A machines only: Use Fair Isle patt Card 2A in place of Card 1A.

If the machine has automatic end needle selection this should be disconnected (see instruction manual).

Col B in FA, Col A in FB, knit 12 rows.

Col A in FA, Col B in FB, knit 12 rows.


Group B machines only: Follow instructions on Fair Isle Chart 2B.

Group C machines only: Use mylar sheet and programme patt from Chart 2C.

Col B in FA, Col A in FB, knit 12 rows.

Col A in FA, Col B in FB, knit 12 rows.

CHART 2B

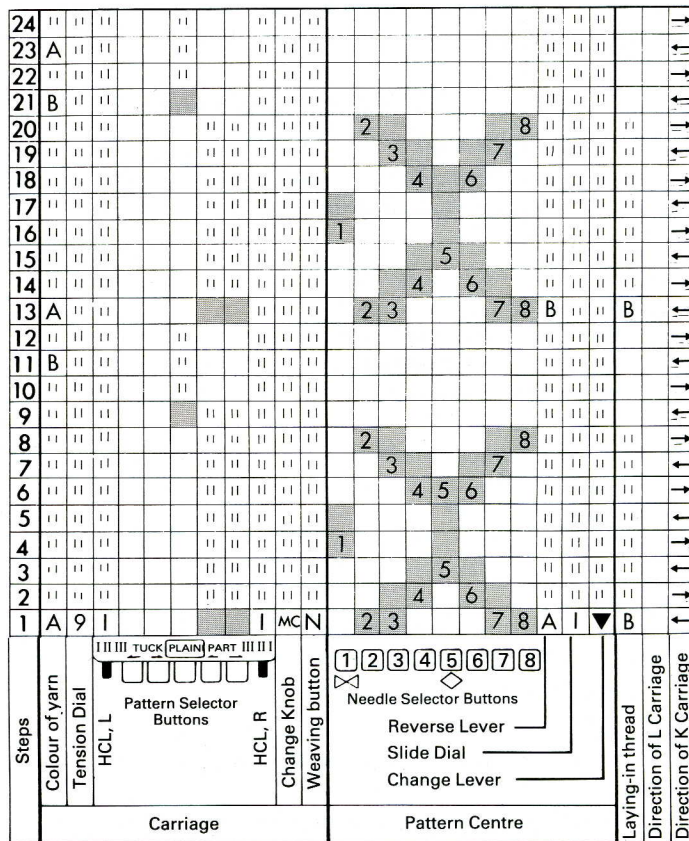

FAIR ISLE PATT 3

Work as given for Sweater or Slipover but working patt as follows:

Group A machines only: Use Fair Isle patt Card 3A in place of Card 1A.


Work with Col A in FA, Col B in FB throughout.

Group B machines only: Follow instructions on Fair Isle Chart 3B.

Group C machines only: Use mylar sheet and programme patt from Chart 3C.

Work with Col A in FA, Col B in FB throughout.

CHART 3B


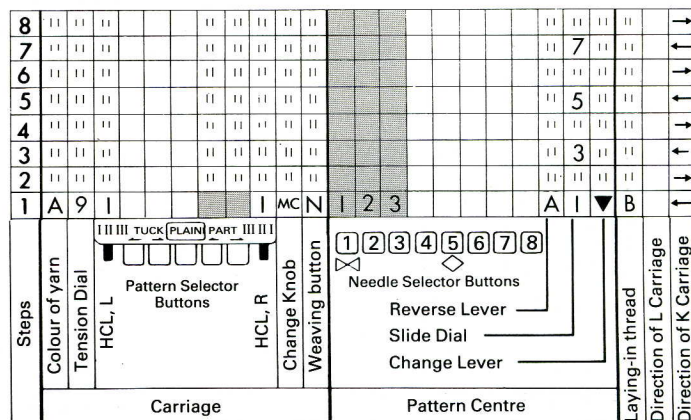


FAIR ISLE PATT 4

Work as given for Sweater or Slipover but working patt as follows:
Group A machines only: Use Fair Isle Patt Card 4A in place of Card 1A.
Work with Col A in FA, Col B in FB throughout.
Group B machines only: Follow instructions on Fair Isle Chart 4B.
Group C machines only: Use mylar sheet and programme patt from Chart 4C.
Work with Col A in FA, Col B in FB throughout.

CARD 4A

CHART 4B

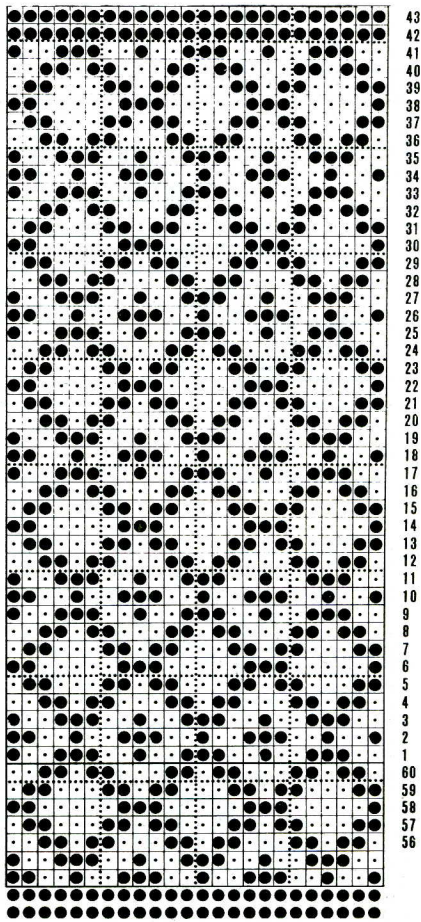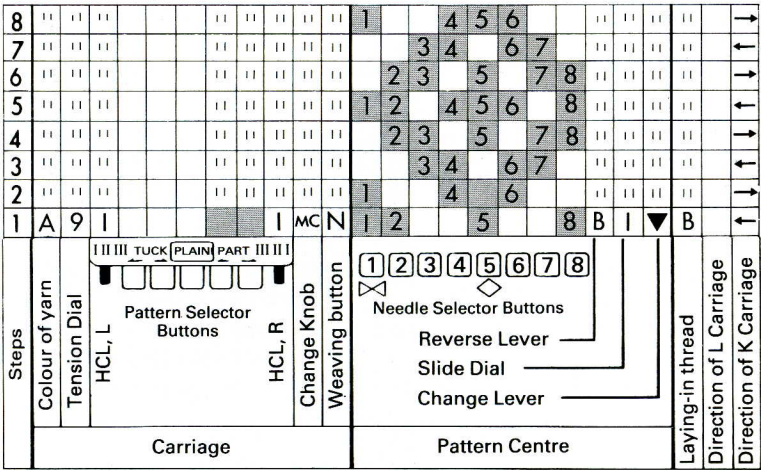

7 LACY TOP

Illustrated in BRAMWELL Artistic Shade Peach.



Techniques required to knit this pattern include:

- knitting a plain hem
- setting for pattern
- picking up sts
- finishing

This pattern gives instructions for a Summer Top with a choice of lace sts. The garment is illustrated in Lace pattern 1. Details for Lace patterns 2, 3 and 4 are given at the end of the pattern.

MACHINES

Groups A, B and C with Lace Carriage.

MATERIALS

BRAMWELL Artistic 500g cones


1 cone for all sizes.

MEASUREMENTS


To fit bust
Actual measurement
Length from shoulder

30	32	34	36	38	40	42 inch
76	81	86	91	97	102	107 cm
88	94	98	104	110	116	120 cm
52	53	53	55	56	58	59 cm


CHART 1B

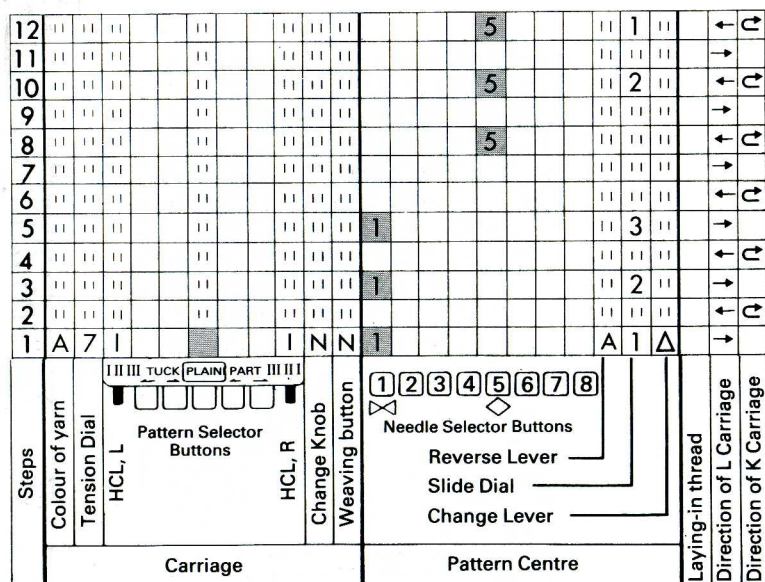


CARD 1A

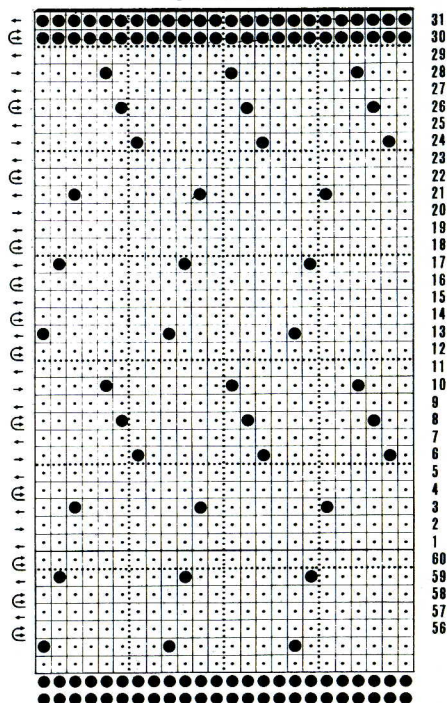



Lace Pattern 3C



Lace Pattern 2C



Lace Pattern 1C

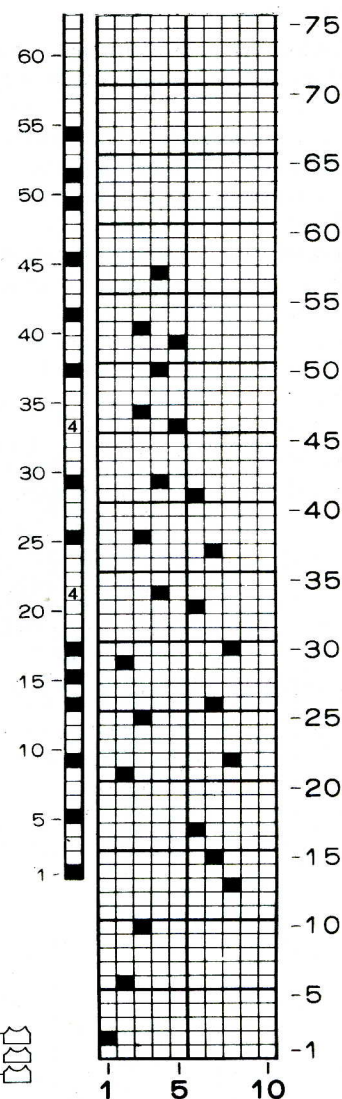

TENSION

Lace patt — 40 sts = 13.8 cm and 60 rows = 14.9 cm, (approx 29 sts and 40 rows = 10 cm square) approx T6.

BACK AND FRONT (alike)

Bring into B position 127

Using WY, cast on and knit a few rows. Knit 1 row using nylon cord. Knit a hem as follows:

RC 000. T5, using MY, knit 10 rows, T8, knit 1 row, T5, knit 10 rows.

Make hem. T6, knit 1 row.

RC 000. T6, knit 2 rows.

Add extension bars and set LC to N for normal lace patt. Hang on lace comb approx 2 cm below sinker hooks so that it will not interfere with the movement of the LC. Hang weights on comb. Set machine for lace patt.

Knit in lace patt until RC reads 126

Shape armholes

At beg of next 2 rows cast off 7 sts 113

Knit straight until RC reads 188

T5, in st st, knit 10 rows. T8, knit 1 row (fold line). T5, knit 9 rows.

Cast off loosely.

127 137 143 151 159 169 175 needles.

126 128 124 122 126 126 128.

113 123 129 137 145 155 161 sts rem.
188 194 194 200 206 212 218.

Pin out to size following measurements on diagram. Lightly steam press to set sts. Fold top band in half to wrong (purl) side along fold line and slip st in place. Join shoulder seams along fold line leaving open for neck.

Armbands

Bring into B position
 With wrong (purl) side of work facing, pick up
 evenly along armhole edge between cast off sts, and hang onto
 needles in B position.

While holding work close to machine, bring needles into HP. RC 000. T5, using MY and with carr set for plain knitting, knit 1 row. Inc 1 st at each end of next row. Knit until RC reads 10. T8, knit 1 row. T5, knit 9 rows. Cast off.

ALTERNATIVE LACE PATTERNS

Providing exactly the same tension is achieved you may use one of the alternative Lace Patterns given for your machine.

LACE PATTERN 2 (Group B and C machines only)

Work as given for Lacy Top but using Chart 2B for group B machines or mylar sheet and programme 2C for 910 users (for 950 users see patt no. 129 from Stitch World).

LACE PATTERN 3 (All machines)

Work as given for Lacy Top but using Card 3A for group A machines, Chart 3B for group B machines and mylar sheet and programme 3C for group C machines.

LACE PATTERN 4 (Group B machines only)

Work as given for Lacy Top but use Card 20 from the standard set.

22 22 23 23 24 25 25 cm

104	110	116	128	134	140	146 needles.
104	110	116	128	134	140	146 sts

Fold armbands in half to wrong (purl) side along fold line and slip st in place. Sew ends of armbands to cast off sts at underarm. Join side seams using mattress st.

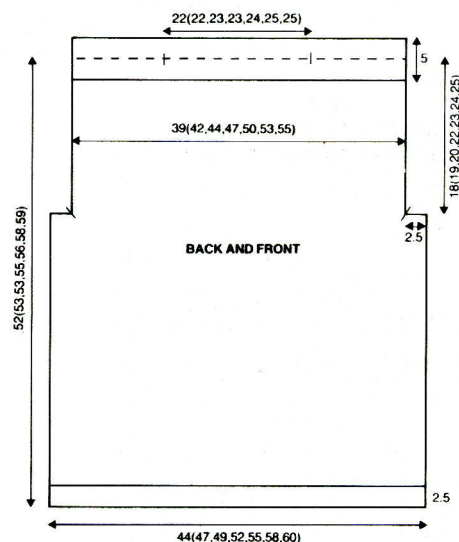


CHART 2B

[illegible]

CHART 3B

The diagram illustrates a 16x16 weaving draft grid. The grid is composed of squares, some of which are numbered 1 through 7, indicating specific thread positions. The grid is divided into four quadrants by a central vertical line. The top-left quadrant contains a pattern of threads, with numbers 1 through 7 indicating specific thread positions. The top-right quadrant contains a pattern of threads, with numbers 1 through 7 indicating specific thread positions. The bottom-left quadrant contains a pattern of threads, with numbers 1 through 7 indicating specific thread positions. The bottom-right quadrant contains a pattern of threads, with numbers 1 through 7 indicating specific thread positions.


Below the grid is a control panel with the following components:

- Carriage:**
 - Colour of yarn Tension Dial
 - HCL, L
 - Pattern Selector Buttons
 - HCL, R
 - Change Knob
 - Weaving button
- Pattern Centre:**
 - Needle Selector Buttons (1-8)
 - Reverse Lever
 - Slide Dial
 - Change Lever
- Laying-in thread:**
 - Direction of L Carriage
 - Direction of K Carriage

CARD 3A

A 60x37 grid of dots with a 6x6 grid of larger dots overlaid. The grid is labeled with numbers 1 to 60 on the left and 1 to 37 on the right. The 6x6 grid of larger dots is centered within the 60x37 grid.

Illustrated in ATKINSONS Brushelle shade BR02 and Metallic ME01.

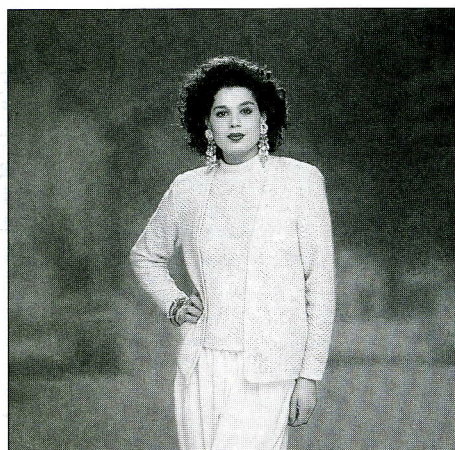

Techniques required to knit this pattern include:

- knitting a plain hem
- decreasing
- increasing
- setting for patt
- holding sts using HP
- holding sts using nylon cord
- waste knitting
- picking up sts
- joining shoulders
- joining shoulders and casting off back neck
- finishing

MACHINES

Groups A, B and C.

MATERIALS

ATKINSONS Brushelle 500g cones and Metallic Thread 100g cones.

Jacket

Top

Shoulder Pads (optional) for Jacket.

Medium size crochet hook and 2 buttons for Top.

MEASUREMENTS

To fit bust

Jacket

Actual measurement

Length from back neck

Sleeve length

Top

Actual measurement

Length from back neck

Col A (Brushelle) 1 cone for all sizes.

Col B (Metallic) 1/2 cone for all sizes.

Col A (Brushelle) 1 cone for all sizes.

Col B (Metallic) 1/2 cone for all sizes.

32	34	36	38	40	42 inch
81	86	91	97	102	107 cm
100	102	108	112	118	120 cm
62	63	64	65	67	68 cm
43	43	44	44	44	45 cm
86	92	96	102	108	112 cm
55	56	57	58	60	61 cm

TENSION

Patt — 40 sts = 15.4 cm and 60 rows = 8.8 cm, (approx 26 sts and 68 rows = 10 cm square) approx T5.

PATTERN NOTES

Group A machines: Use Card 2 from standard set.

Group B machines: Follow instructions on chart.




Group C machines: For 910 machines use mylar sheet and programme as shown on chart. For 950 machines see pattern No. 309 from Stitch World.

NOTES: Both yarns are worked together throughout. We used the plating yarn feeder so that the metallic thread lies on the right side of the work. If you do not have a plating facility both yarns can be threaded through the carriage together.

Reverse (purl) side of work is used as the right side.

The fronts are worked to the left or right of needle bed so that the patt will match at the side seams.

When working on one side of the machine, make sure that the carriage travels far enough to operate the row counter and the pattern mechanism.

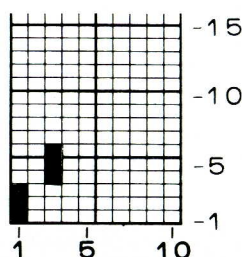[illegible]

JACKET

BACK

Bring into B position 129 133 141 145 153 157 needles.

★Using WY cast on and knit a few rows. Knit 1 row nylon cord.

Knit hem as follows:

RC 000. T5, using Col B in Main Yarn Feeder and Col A in Plating Yarn Feeder, knit 10 rows. T8, knit 1 row. T5, knit 10 rows.

Make hem. Do not knit row. COL.

Set for patt. T6, knit 1 row to arrange needles for patt.

Press both tuck buttons. Thread Col A in Main Yarn Feeder and Col B in Plating Yarn Feeder. ★

RC 000. T5, work in tuck st patt until RC reads 244.

Shape armholes

At beg of next 2 rows cast off 4 4 5 5 6 6 sts.

Dec 1 st at both ends of next and every foll alt row until 107 111 115 119 123 127 sts rem,

then every foll 4th row until 97 101 103 107 111 115 sts rem.

Knit straight until RC reads 392 398 406 412 424 432 rows.

Shape shoulders

At the opposite end to carr, using the nylon cord, place into A position 3 needles. Knit 1 row.

*At the carr end place 1 st into A position and at the opposite end to carr place 3 sts into A position. Knit 1 row. *

Rep from * to * 10 10 10 10 12 12 times more.

**At the carr end place 1 st into A position and at the opposite end to carr place 3 4 4 5 2 3 sts into A position. Knit 1 row. **

Rep from ** to ** once more. At the carr end place 1 st into A position and at the opposite end to carr return 28 29 29 30 31 32 sts to B position from nylon cord. Knit 1 row.

Set carr for plain knitting.

At the opposite end to carr return 28 29 29 30 31 32 sts to B position from nylon cord. Knit 1 row. At left-hand side bring

into HP 69 72 74 77 80 83 sts.

Waste knit rem 28 29 29 30 31 32 sts for shoulder.

Bring into D position next 41 43 45 47 49 51 sts.

Waste knit these sts for neckband.

Waste knit rem 28 29 29 30 31 32 sts for shoulder.

Waste knit rem 28 29 29 30 31 32 sts for shoulder.

Waste knit rem 28 29 29 30 31 32 sts for shoulder.

LEFT FRONT

Working at the right-hand side of machine and starting at needle No 1 to right of centre 0, bring into B position 65 67 71 73 77 79 needles.

Work as given for Back from ★ to ★.

RC 000. T5, work in tuck st patt, dec 1 st at front edge on 7th and every foll 18th 18th 18th 16th 16th 16th row

until RC reads 244 51 53 57 58 62 64 sts rem.

Shape armhole

Keeping front decs correct throughout, cast off 4 4 5 5 6 6 sts

at beg of next row. Knit 1 row.

Dec 1 st at armhole edge on next row, then foll 6 6 7 7 8 8 alt rows.

Dec 1 st on every foll 4th row 5 5 6 6 6 6 times,

..... 33 35 36 36 38 40 sts rem.

RC reads 279 279 285 285 287 287.

Keeping armhole edge straight, cont to dec at front edge until 28 29 29 30 31 32 sts rem.

Knit straight until RC reads 393 399 407 413 425 433.

Shape shoulder

* At the opposite end to carr, using the nylon cord, place into A position 3 sts. Knit 1 row. At carr end place 1 st into A position. Knit 1 row. *

Rep from * to * 5 5 5 5 6 6 times more.

Return sts from nylon cord to B position. Set for plain knitting and knit 1 row. Waste knit.

RIGHT FRONT

Working at the left-hand side of machine and starting at needle No 1 to right of centre 0, bring into B position 65 67 71 73 77 79 needles.

Work as given for Back from ★ to ★.

Work as given for Left Front reversing shapings until RC reads 245. Follow armhole shaping and work until RC reads 394. Follow shoulder shaping.

SLEEVES

Bring into B position 59 59 61 63 67 69 needles.

Work as given for Back from ★ to ★.

RC 000. T5, work in tuck st patt inc 1 st at both ends of 5th and

every foll

until there are

Knit straight until RC reads

18th	16th	16th	16th	16th	14th row
89	93	97	99	103	107 sts.
278	278	286	286	286	292.

Shape top

RC 000. At beg of next 2 rows cast off

Dec 1 st at both ends of next and foll 2 alt rows, then every foll

4th row until

Dec 1 st on every foll 6th row until

then every foll 4th row until

RC reads

4	4	5	5	6	6 sts.
63	67	69	71	73	77 sts rem.
49	51	51	51	51	53 sts rem.
39	41	41	41	39	41 sts rem.
93	99	105	111	121	127.

Dec 1 st at both ends of foll 4 alt rows. Knit 1 row.

Cast off 3 sts at beg of next 2 rows, then 4 sts at beg of foll 2 rows

Cast off rem

17	19	19	19	17	19 sts.
----	----	----	----	----	---------

FRONT BANDS (both alike)

Bring into B position

With right (purl) side of work facing, pick up sts along left or right front edge and place them onto needles in B position.

★★ Thread carr with Col B in Main Yarn Feeder and Col A in

Plating Yarn Feeder and set for plain knitting.

RC 000. T5, knit 7 rows. T8, knit 1 row (fold line). T5, knit 9 rows.

Waste knit.★★

151	153	156	158	163	166 needles.
-----	-----	-----	-----	-----	--------------

BACK NECKBAND

Shoulder seams

Bring into B position

Replace the sts for left shoulder from back and front onto needles in B position. Knit 1 row and cast off together. Repeat for right shoulder.

Bring into B position

With right (purl) side of work facing, replace sts from back neck onto needles in B position.

Complete as given for Front Bands from ★★ to ★★.

28	29	29	30	31	32 needles.
41	43	45	47	49	51 needles.

TO MAKE UP

Pin out to size following measurements on diagram.

Cover with a damp cloth and leave to dry. Do not press.

Join side and sleeve seams using back st. Join ends of bands using mattress st. Set in sleeves. Fold bands to right side of work along fold line. Working through every st, back st through open loops on right side of work. Insert shoulder pads if required.

TOP

BACK

Bring into B position

Work as given for Back of Jacket from ★ to ★.

RC 000. T5, work in tuck st patt until RC reads 224.

113	121	125	133	141	145 needles.
-----	-----	-----	-----	-----	--------------

Shape armholes

RC 000. At beg of next 2 rows cast off

Dec 1 st at both ends of next and every foll alt row until

then every foll 4th row until

Knit 3 rows. RC reads

Dec 1 st at both ends of next and every foll 8th row until

then dec every foll 12th row until

Knit until RC reads

6	6	6	7	8	8 sts.
89	95	95	99	105	105 sts rem.
85	83	87	93	97	101 sts rem.
24	42	38	36	40	36.
73	77	81	85	87	91 sts rem.
71	73	75	79	81	83 sts rem.
84	88	94	100	110	118.

Make a note of the patt row. ★★★

Divide for back opening

Trans centre st onto next needle at right and place empty needle into A position. Using nylon cord place needles to left of centre 0 into A position.

RC 000. Keeping back opening edge straight cont dec at

armhole edge as before until

Knit straight until RC reads

31	32	33	35	36	37 sts rem.
53	53	57	57	59	59.

Set for plain knitting. Knit 1 row. Waste knit.

With COL return sts held on nylon cord to B position.

Refer to your instruction manual for re-setting 2nd side.

Rejoin yarn and knit 1 row.

Reset RC to 000 and complete as given for first side.

FRONT

Work as given for Back to ★★★.

Divide for neck

Using a spare length of Col A, cast off centre and return empty needles to A position.

Counting from the left and using nylon cord place into

A position

RC 000. Keeping armhole decs correct, AT THE SAME TIME

dec 1 st at neck edge on 3rd and every foll alt row 8 times in all

and then on every foll 4th row until

Dec 1 st at armhole edge only on 12th row from previous dec . .

Knit straight until RC reads

Set for plain knitting. Knit 1 row. Waste knit. With COL, return sts held on nylon cord to B position.

Refer to your instruction manual for re-setting 2nd side.

Rejoin yarn and knit 1 row.

Return RC to 000 and complete as given for first side.

15	17	17	17	19	21 sts
28	28	29	31	31	31 needles.
13	13	13	14	14	14 sts rem.
12	12	12	13	13	13 sts rem.
53	53	57	57	59	59.

ARMBANDS

Shoulder seams

Bring into B position

Join left shoulder seam and cast off back neck sts at same time.

Repeat for right shoulder and back neck.

Bring into B position

With right (purl) side of work facing, pick up

evenly around armhole edge and place onto needles in B position.

Thread carr with Col B in Main Yarn Feeder and Col A in Plating

Yarn Feeder and set for plain knitting. RC 000. T5, knit 7 rows, T8,

knit 1 row (fold line). T5, knit 9 rows. Waste knit.

31	32	33	35	36	37 needles.
116	120	129	133	144	150 needles.
116	120	129	133	144	150 sts

NECKBAND

Bring into B position

Using Col A, COBH. Thread carr with Col B in Main Yarn Feeder and Col A in Plating Yarn Feeder and set for plain knitting.

RC 000. T6, knit 6 rows. T5, knit 8 rows. T4, knit 10 rows. T7, knit

1 row (fold line). T4, knit 10 rows. T5, knit 8 rows. T6, knit 6 rows.


RC reads 49. Waste knit.

97	101	105	107	113	117 needles.
----	-----	-----	-----	-----	--------------

TO MAKE UP


Pin out to size following measurements on diagram. Cover with a damp cloth and leave to dry. Do not press. Join side and armband seams using back st, reversing seam for armband. Fold armbands in half to right side along fold line. Working through every st, back st in place through open loops on right side of work. Attach

neckband evenly round neckline by back stitching through open loops onto right (purl) side of work. Fold in half to wrong side and slip st in place. Close ends of neckband. Work 1 row of double crochet round back opening making 2 button loops evenly spaced on right-hand edge of neckband. Sew on buttons.

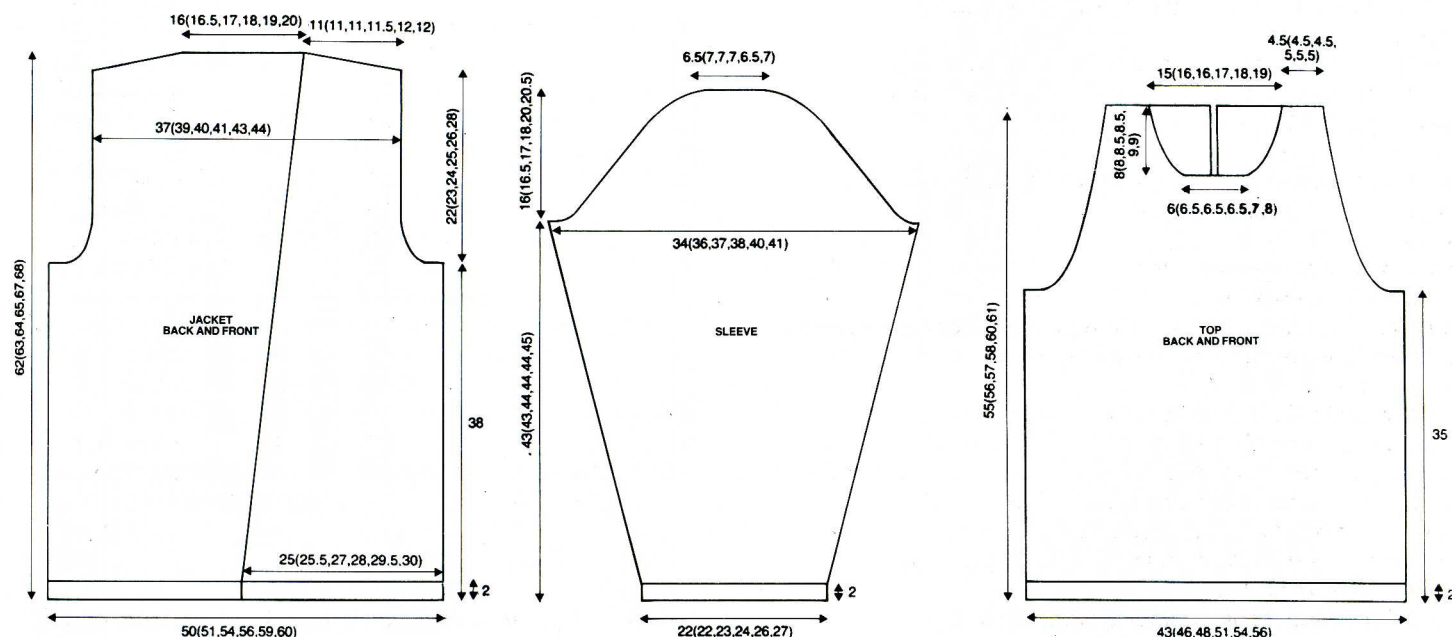

9 MAN'S ZIP JACKET

Illustrated in BRAMWELL Fine 4 ply, shade 392.

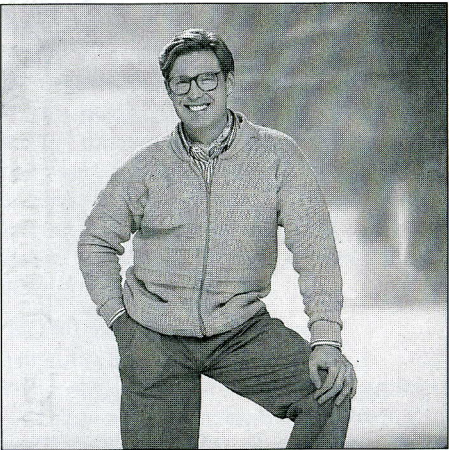

Techniques required to knit this pattern include:

- ribs (for DB machines only)
- mock rib (for SB machines only)
- setting for pattern
- increasing
- decreasing
- holding sts using nylon cord
- waste knitting
- joining shoulders and casting off back neck
- picking up sts
- marking side edges
- finishing

MACHINES

Groups A, B and C.

MATERIALS

BRAMWELL Fine 4 ply 500g cones 1
Open ended Zip Fastener — Length 60

MEASUREMENTS

To fit chest 32
Actual measurement 81
Length from back neck 94
Sleeve length 68
To fit chest 46

TENSION

Patt — 40 sts = 19.2 cm and 60 rows = 9.9 cm, (approx 21 sts and 61 rows = 10 cm square) approx T8.



RIBS




DB machines: 1 x 1 pitch setting, T2/2 or SB machines: 2 x 1 mock rib, T4.

1	1	1	1	1	1	2	2 cones
60	60	60	60	65	65	65	65 cm
32	34	36	38	40	42	44	46 inch
81	86	91	97	102	107	112	117 cm
94	101	105	112	117	122	129	134 cm
68	68	69	69	74	75	75	75 cm
46	46	48	48	49	49	50	50 cm

NOTE

Reverse (purl) side of work is used as the right side.
The fronts are worked to the left or right of the needle bed so that the pattern will match at the side seams. When working on one side of the machine, make sure that the carr travels far enough to operate the row counter and pattern mechanism.

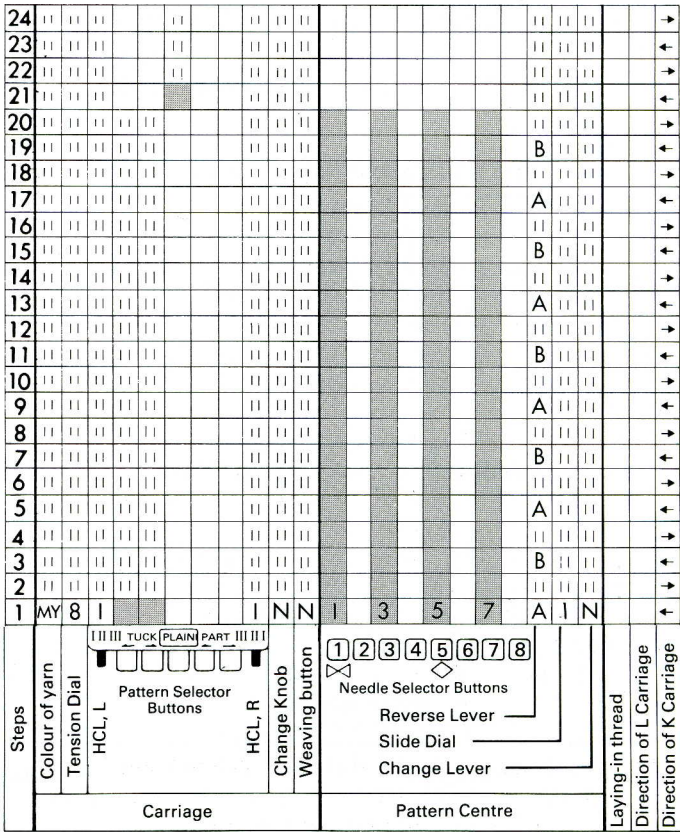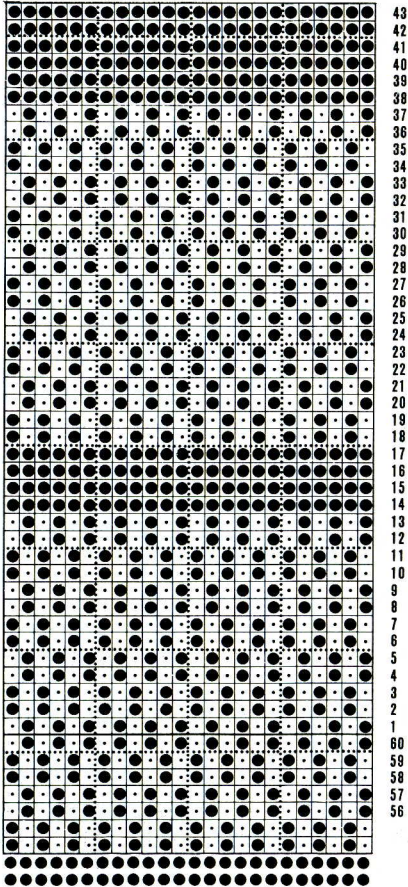

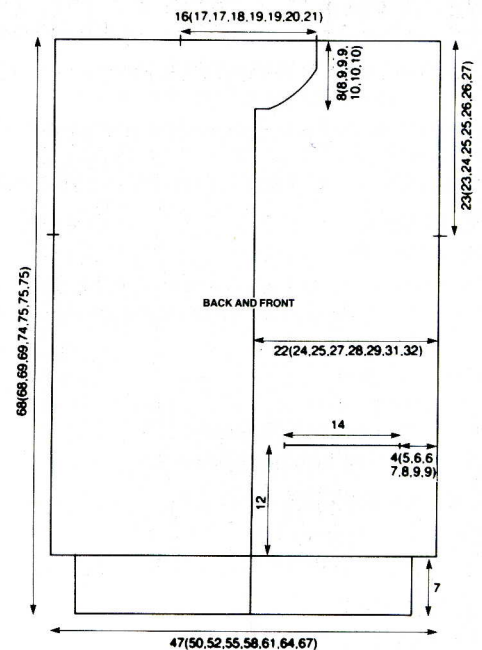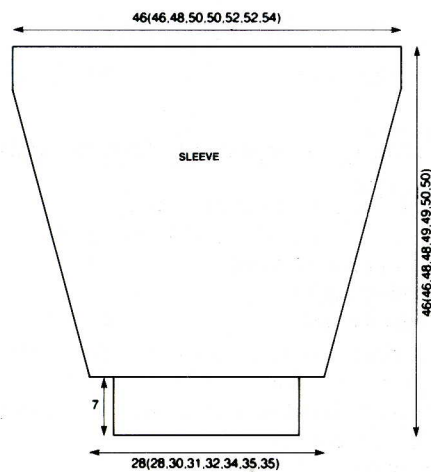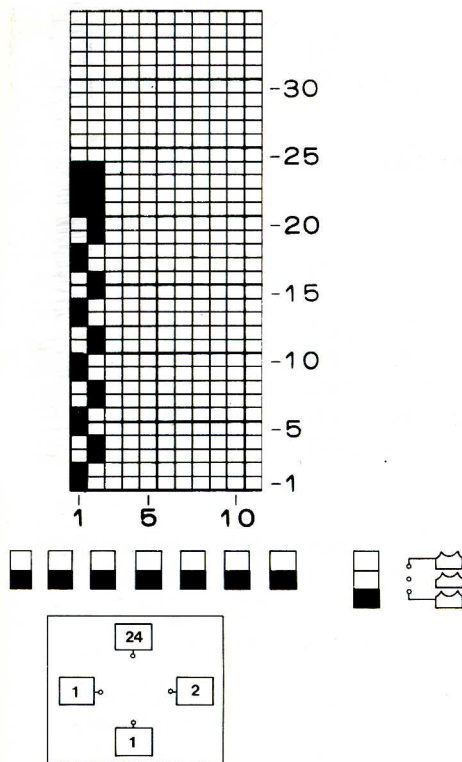

BACK

Bring into B position 98 104 110 116 122 128 134 140 needles.

★ Work rib as follows:

SB machines only: Arrange needles for 2 x 1 mock rib.

T4, knit 27 rows. T8, knit 1 row. T4, knit 27 rows. Make a hem. Do not knit row. COL.

All machines: Set for patt and knit 1 row to arrange needles for tuck st patt.

Press both Tuck Buttons. ★

RC 000. T8, work in tuck st patt until RC reads 232 232 234 226 256 256 256 250.

Place a WY marker at each side edge. Cont in tuck st patt until

RC reads 373 373 377 377 407 413 413 413.

Set for plain knitting and knit 1 row. COR. Waste knit.

POCKET LININGS (make 2)

Bring 30 needles into HP and using main yarn COBH. T8, knit 1 row. Set carr for patt and knit 1 row to arrange needles. Press both Tuck Buttons. RC 000. T8, in tuck st patt knit until RC reads 70. Waste knit.

LEFT FRONT

Working at right hand side of machine starting at needle No. . . 49 52 55 58 61 64 67 70
to right of centre, 0, bring into B position 47 50 53 56 59 62 65 68 needles.
to right of centres.

Work as given for Back from ★ to ★.

★★ RC 000. T8, work in tuck st patt to RC 70. Remove yarn from Feeder A but do not break off.

Place pocket

Take into A position using nylon cord first 9 10 12 13 15 16 18 19 needles
at side edge and last 8 10 11 13 14 16 17 19 needles

at front edge leaving 30 needles in B position.

Set for plain knitting and waste knit centre 30 sts, ending COL.

With right (purl) side of work facing, replace the 30 sts from pocket lining onto the 30 empty needles.

Bring sts held on nylon cord into B position and arrange needles for next row of patt.

Replace yarn into Feeder A and cont in tuck st patt until RC reads

Place a WY marker at side edge.

Cont straight until RC reads 321 321 321 321 349 349 349 349★★.

Shape neck

At beg of next row, cast off 3 3 3 3 3 4 4 4 sts.

Dec 1 st at neck edge on next and every foll alt row until 32 34 37 39 41 44 46 48 sts

rem. Knit straight until RC reads 373 373 377 377 407 413 413 413.

Set for plain knitting and knit 1 row. Waste knit.

98 104 110 116 122 128 134 140 needles.

DB machines only: Arrange needles for 1 x 1 rib pitch setting.

Using MY cast on. T2/2, knit 27 rows. Trans sts to MB. COL.

232 232 234 226 256 256 256 250.

373 373 377 377 407 413 413 413.

49 52 55 58 61 64 67 70
47 50 53 56 59 62 65 68 needles.

9 10 12 13 15 16 18 19 needles
8 10 11 13 14 16 17 19 needles

232 232 234 226 256 256 256 250.

321 321 321 321 349 349 349 349★★.

3 3 3 3 3 4 4 4 sts.

32 34 37 39 41 44 46 48 sts

373 373 377 377 407 413 413 413.

RIGHT FRONT

Working at left-hand side of machine starting at needle No	49	52	55	58	61	64	67	70
to left of centre 0, bring into B position	47	50	53	56	59	62	65	68 needles.
Work as given for Back from ★ to ★.								
Work as given for Left Front from ★★ to ★★. Knit 1 row.								
RC reads	322	322	322	322	350	350	350	350.
Complete as given for Left Front from Shape neck to end.								

SLEEVES

Bring into B position	59	59	62	65	68	71	74	74 needles.
Work as given for Back from ★ to ★. RC 000. T8, work in tuck st								
patt, shaping sides by inc 1 st at each end of 5th and every foll .	10th	10th	10th	10th	12th	12th	12th	10th row
until there are	79	79	80	83	102	105	92	80 sts
then every foll	12th	12th	12th	12th	14th	14th	14th	12th row
until there are	97	97	102	105	106	109	110	114 sts.
Knit straight until RC reads	235	235	249	249	255	255	261	261.
Set for plain knitting and knit 1 row. Cast off loosely.								

FRONT BANDS

Bring into B position	173	173	173	173	188	188	188	188 needles.
With wrong (knit) side of work facing, pick up	173	173	173	173	188	188	188	188 sts
evenly along front edge and place onto needles in B position								
(working through double thickness of welt for SB machines).								
T7, knit 1 row.								

SB machines only: Trans every 3rd st onto next needle leaving empty needles in A position. T4, knit 5 rows, T8, knit 1 row. T4, knit 4 rows. Bring empty needles back into B position. T7, knit 1 row and cast off loosely.

DB machines only: Trans every alt st to ribber and weight work. T3/3, in rib knit 9 rows. Trans sts back to MB and cast off loosely.

POCKET TOPS

Bring 35 needles into B position. Place the 30 pocket sts held on WY onto needles in B position leaving every 6th needle empty. Fill empty needles by picking up loop from below next st and placing it onto empty needle. T7, knit 1 row.

SB machines only: Trans every 3rd st onto next needle leaving empty needles in A position. T4, knit 10 rows. T8, knit 1 row. T4, knit 9 rows. Bring empty needles into B position. T7, knit 1 row and cast off loosely.

DB machines only: Trans every alt st onto ribber and weight work. T2/2, in rib knit 20 rows. Trans sts back to MB and cast off loosely.

COLLAR

Shoulder seams

Bring into B position	98	104	110	116	122	128	134	140 needles.
Join shoulder seams and cast off back neck at the same time. Fold								
front bands in half to wrong side and slip st in place. Using main								
yarn, COBH	102	109	109	120	129	129	134	139 sts.
RC 000. T7, knit 1 row. Set HCL lever to H (II for 710 users).								
Always winding yarn under last needle in HP, bring 1 needle at								
opposite end to carr into HP on next 6 rows, 2 needles into HP on								
next 6 rows, then 3 needles into HP on foll 6 rows. RC reads 19.								
T4, knit 1 row (fold line).								
T7, push 3 needles at opposite end to carr back into D position on								
next 6 rows, 2 needles into D position on next 6 rows, then 1								
needle into D position on foll 6 rows. All needles now back in B								
position. Knit 1 row. RC reads 39.								
With wrong (knit) side of work facing and starting at right, pick up								
and place on needles in B position 4 sts from end of left front								
band, up left front neck pick up	29	31	31	35	39	39	40	41 sts,
across back neck pick up	36	39	39	42	43	43	46	49 sts,
down right front neck pick up	29	31	31	35	39	39	40	41 sts,
and 4 sts from end of right front band.								
T8, knit 1 row and cast off.								

TO MAKE UP

Pin out to size following measurements on diagram. Cover with a damp cloth and leave to dry. Do not press. Fold Pocket Tops and Collar in half to wrong side and slip st in place. Sew Pocket Linings and sides of Pocket Tops in position. Place centre of cast off edge of sleeve to shoulder seam then sew sleeve in place between markers using back st. Join side and sleeve seams using back st. Sew zip fastener in place as illustrated.






Fair Isle Patterns



1

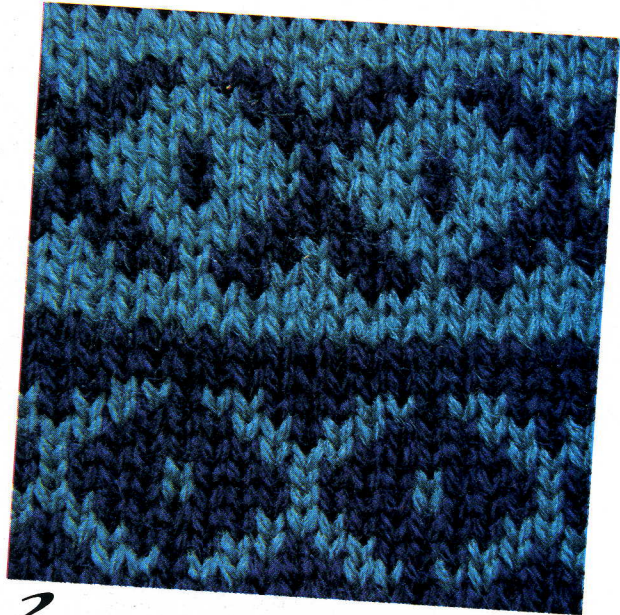

2




3




4




Lace Patterns

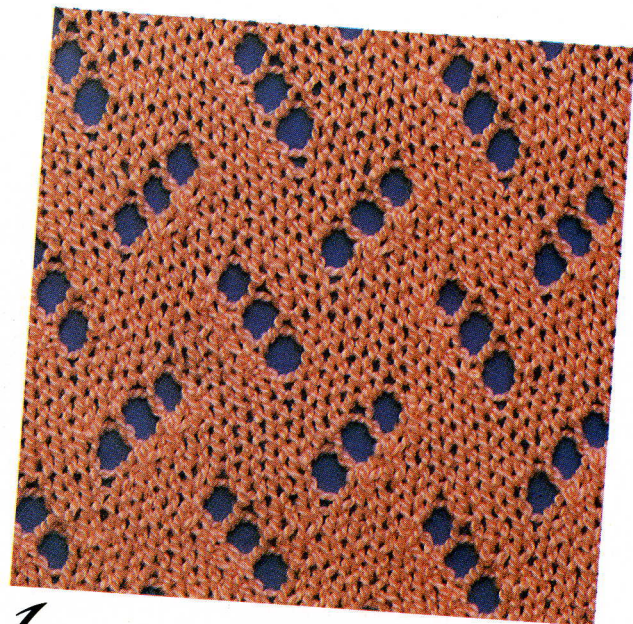


1

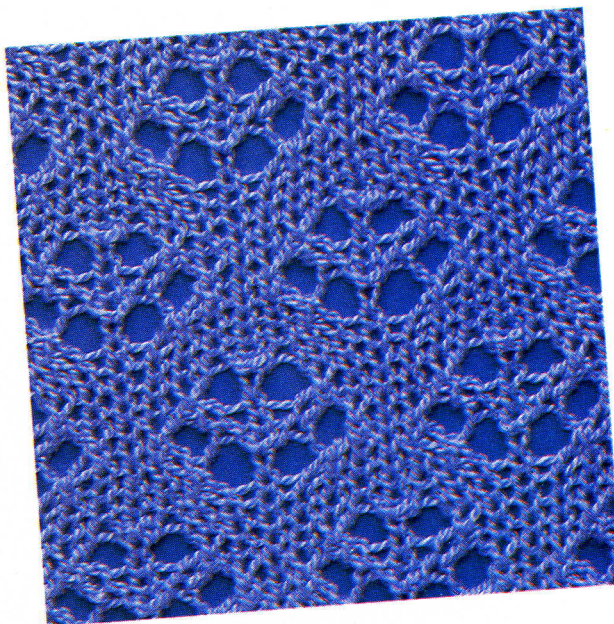

2

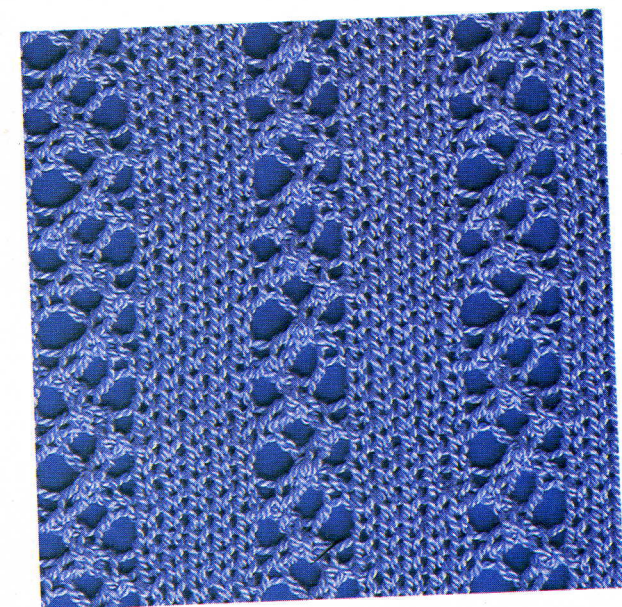

3

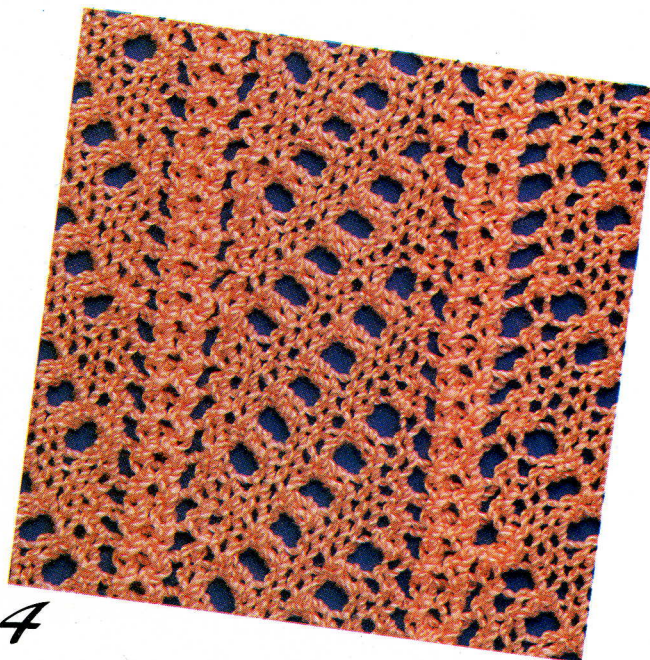

4







The future at your fingertips.